


### Description

DC0285W25 surface mount bi-directional coupler provides high power handling up to 100W and low mainline loss of 0.12 dB typically for applications from 30 to 540 MHz. The coupler features core and wire construction mounted on an 8-lead printed laminate base with wraparound terminations for excellent solderability. The unit measures 8.6 x 17.57 x 9.7", accommodating dense circuit board layouts.

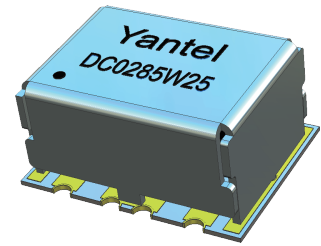

### Features:

- 30-540 MHz
- High power handling, up to 100 W
- Low mainline loss
- High directivity
- Excellent VSWR
- Good Repeatability

### Electrical Specifications (typical)

Frequency MHz	Forward Coupled dB	Directivity dB Min	Return Loss dB Min
30-50	25±2	17	12
50-540	25±2	22	17


  

Insertion Loss dB Max	Power Avg. CW Watts	Operating Temp. °C
0.40	100	-55 to +85
0.25	100	-55 to +85

### Note:

1. All above test data resulting from specify demo board.
2. Insertion loss has removed the thru board loss.

### Mechanical Outline

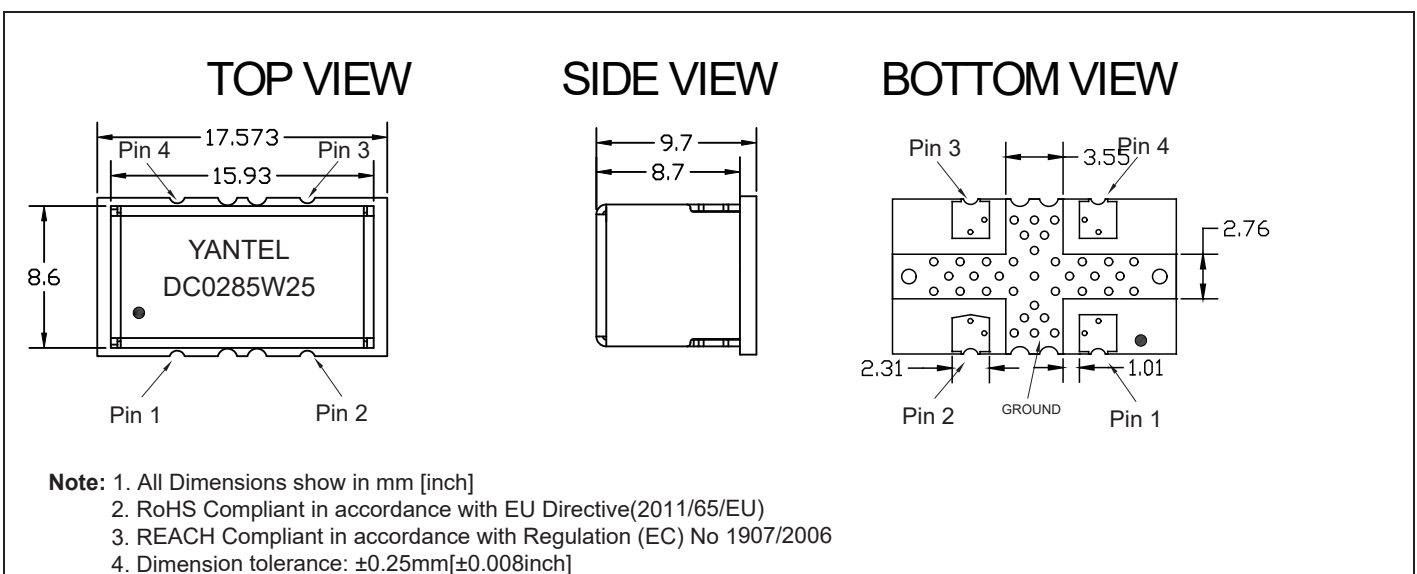


### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Directional Coupler Pin Configuration

The DC0285W25 has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

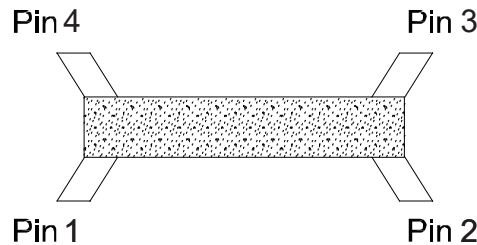

Pin 1	Pin 2	Pin 3	Pin 4
Input	Forward Coupled	Reflected Coupled	OUTPUT
OUTPUT	Reflected Coupled	Forward Coupled	Input

### Typical Performance Data (@25°C)


Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
30	-0.32	-26.52	-26.53	-17.90	-17.94	-12.27	-12.31	-12.66	-12.68
56	-0.09	-26.11	-26.12	-23.88	-23.82	-17.88	-17.89	-18.25	-18.29
82	-0.06	-26.01	-26.04	-28.30	-27.67	-21.06	-21.07	-21.54	-21.47
108	-0.05	-25.98	-26.00	-31.71	-30.62	-22.88	-23.01	-23.43	-23.56
134	-0.04	-25.98	-25.99	-33.59	-32.47	-24.44	-24.25	-25.18	-25.08
160	-0.04	-25.96	-25.96	-33.00	-32.43	-25.85	-25.17	-26.39	-25.78
186	-0.05	-25.94	-25.95	-33.63	-34.03	-25.85	-25.95	-26.53	-26.73
212	-0.06	-25.92	-25.92	-32.57	-33.79	-25.92	-25.94	-27.06	-26.89
238	-0.06	-25.89	-25.90	-31.46	-33.11	-26.15	-25.97	-27.49	-27.38
264	-0.05	-25.85	-25.87	-30.91	-32.25	-26.58	-26.38	-27.89	-27.81
290	-0.06	-25.83	-25.85	-29.62	-31.05	-26.65	-26.40	-27.95	-27.92
316	-0.06	-25.80	-25.81	-28.93	-30.47	-26.53	-26.27	-27.95	-27.64
342	-0.07	-25.76	-25.77	-27.93	-29.05	-26.31	-25.98	-27.52	-27.48
368	-0.08	-25.70	-25.70	-27.35	-28.28	-26.11	-25.92	-27.48	-27.26
394	-0.08	-25.67	-25.68	-26.59	-28.02	-25.81	-25.61	-27.46	-27.29
420	-0.09	-25.62	-25.63	-25.72	-27.12	-25.80	-25.50	-27.14	-27.25
446	-0.09	-25.56	-25.57	-25.11	-26.39	-25.67	-25.44	-26.87	-27.19
472	-0.1	-25.50	-25.50	-24.23	-25.51	-25.62	-25.16	-26.78	-26.77
498	-0.1	-25.44	-25.44	-23.47	-24.51	-25.31	-25.20	-26.58	-26.15
524	-0.1	-25.37	-25.37	-22.74	-23.89	-24.96	-24.84	-25.96	-25.77
540	-0.11	-25.31	-25.29	-22.18	-23.55	-24.66	-24.39	-25.62	-25.44

### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Typical Performance (25°C : 30-540 MHz)

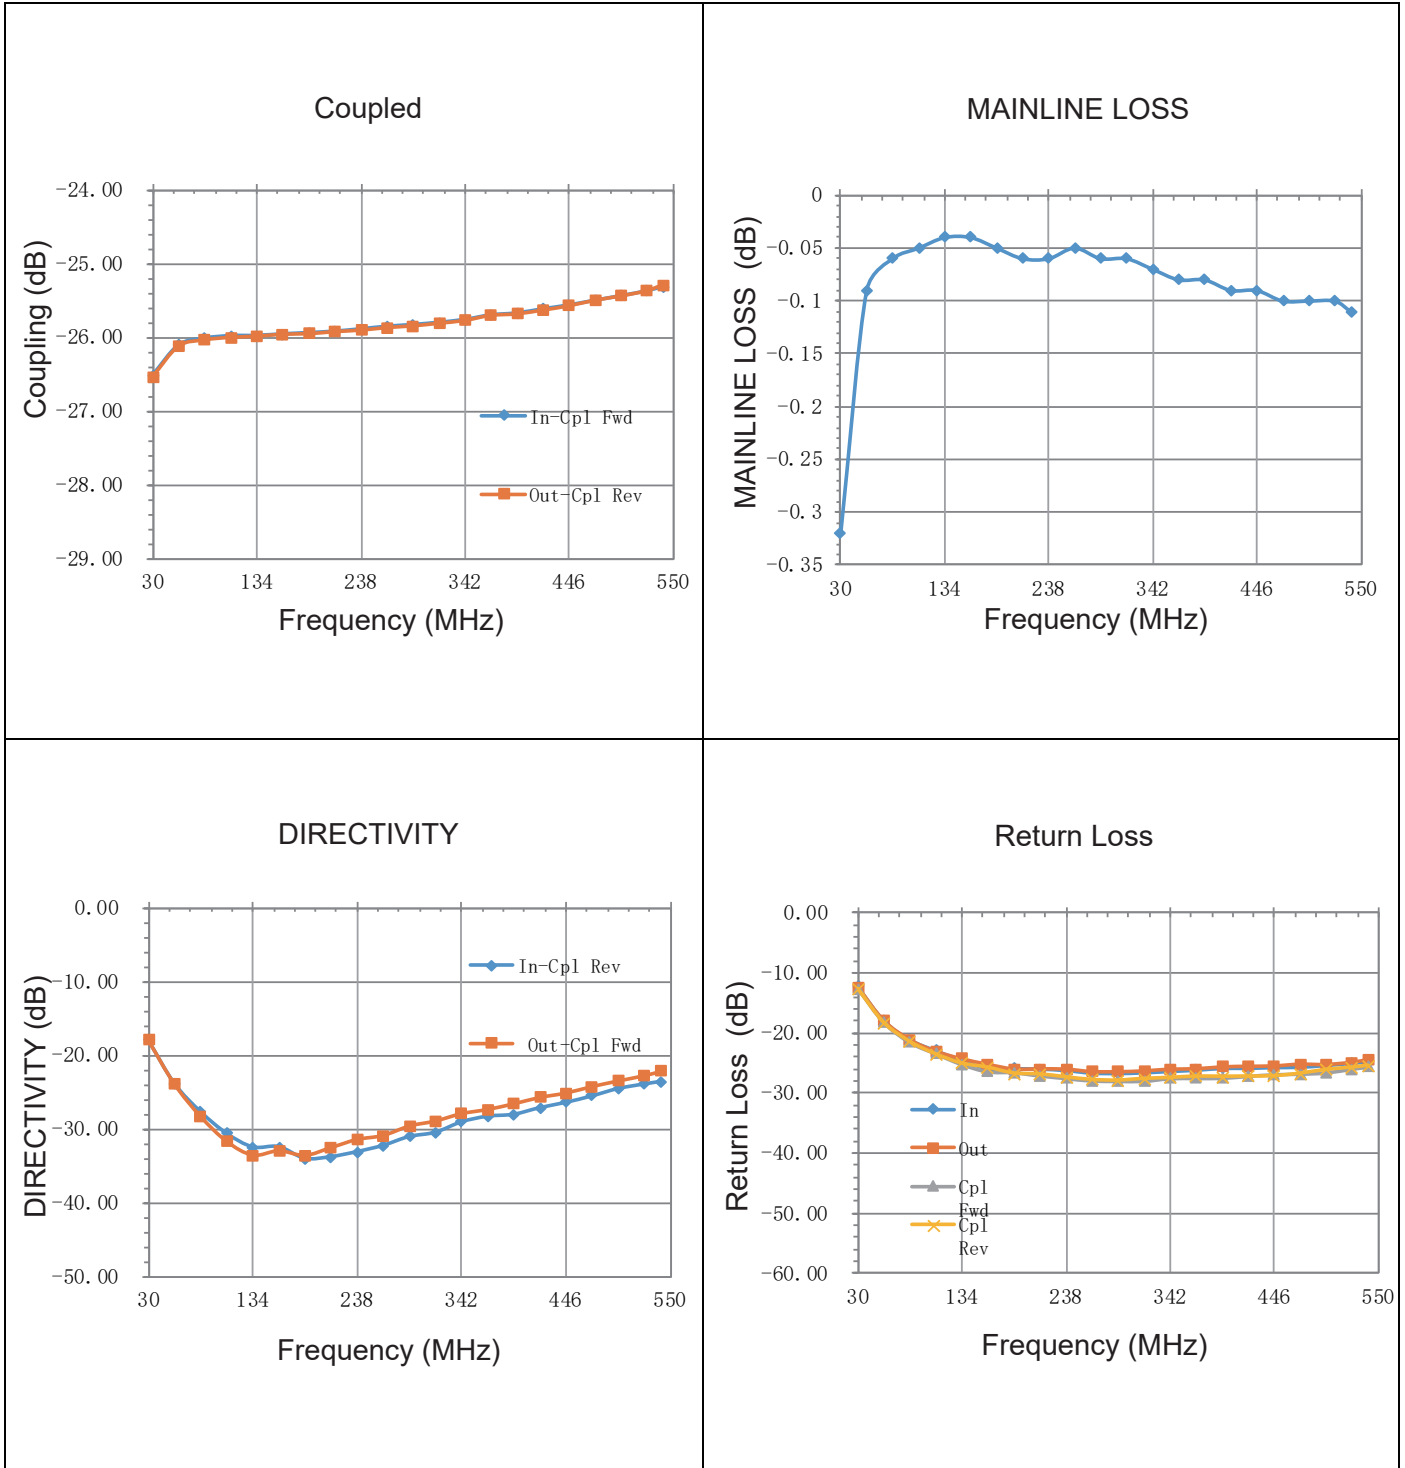

### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Description of Measured Specifications


Parameter	Description
<b>VSWR</b>	Voltage standing wave ratio, the impedance match to $50\ \Omega$ , the ideal value is 1:1.
<b>Return Loss</b>	Loss of signal power resulting from the reflection caused by discontinuity of transmission line.
<b>Insertion Loss</b>	The input power divided by sum of power at the Forward Coupled port & transmission port
<b>Forward Coupled</b>	The input power divided by the power at coupling port.
<b>Transmission</b>	The input power divided by the power at transmission port.
<b>Directivity</b>	The power at the Forward Coupled port divided by the power at the Reflected Coupled port

### Test Method

1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of Forward coupled through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of Reflected Coupled through port 1 to port 2(S21).
6. Measure the data of return loss port 1, port 3.
7. According to the above data to calculate insertion loss, directivity.

Note:

1. When calculating insertion loss at room temperature, coupling & transmission data both need remove demo board loss. Please see demo board loss data below the table :

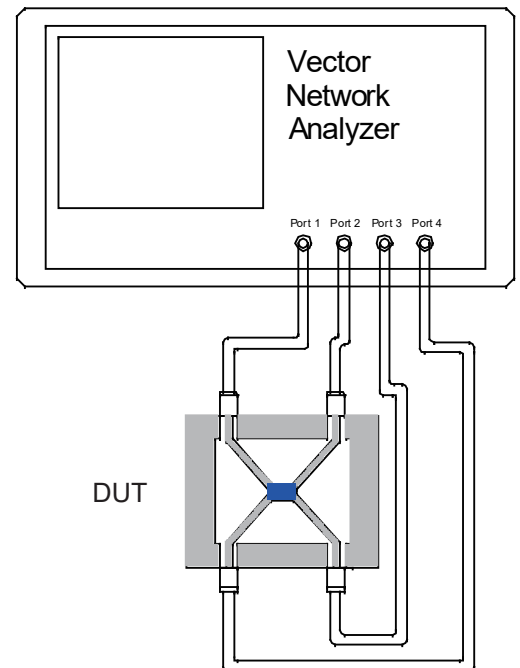


### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)


### Recommended PCB Layout

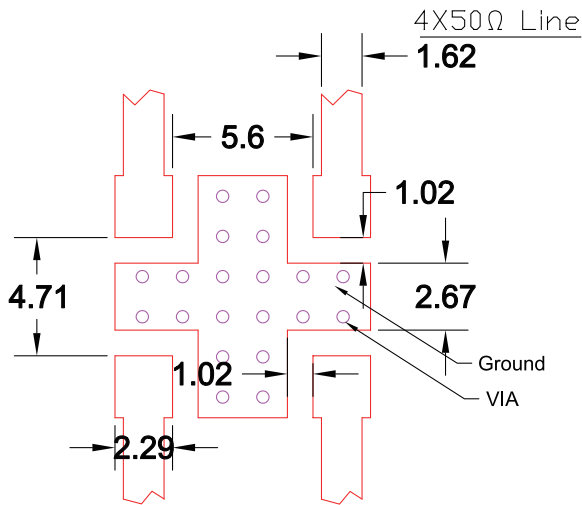

**NOTE:**

1. 50Ω line width is shown above designing from RO4350B dielectric thickness 0.762mm; copper 1 OZ
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm .

### Reflow Profile

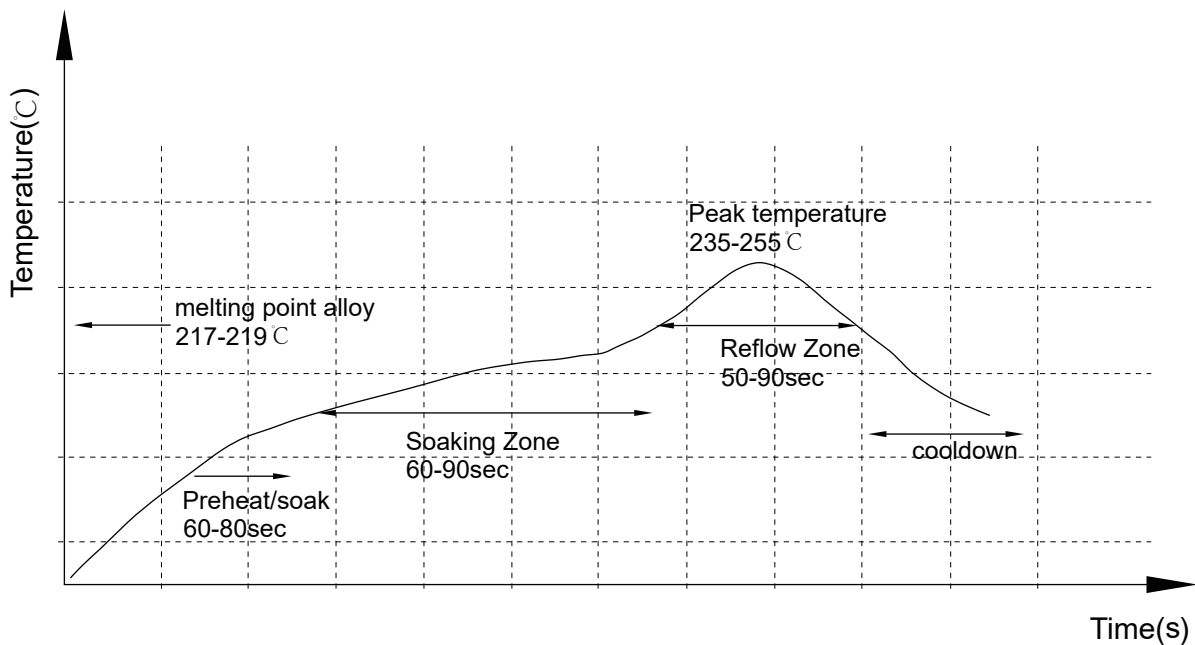

### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Reliability Test Flow




### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Reliability Test Flow

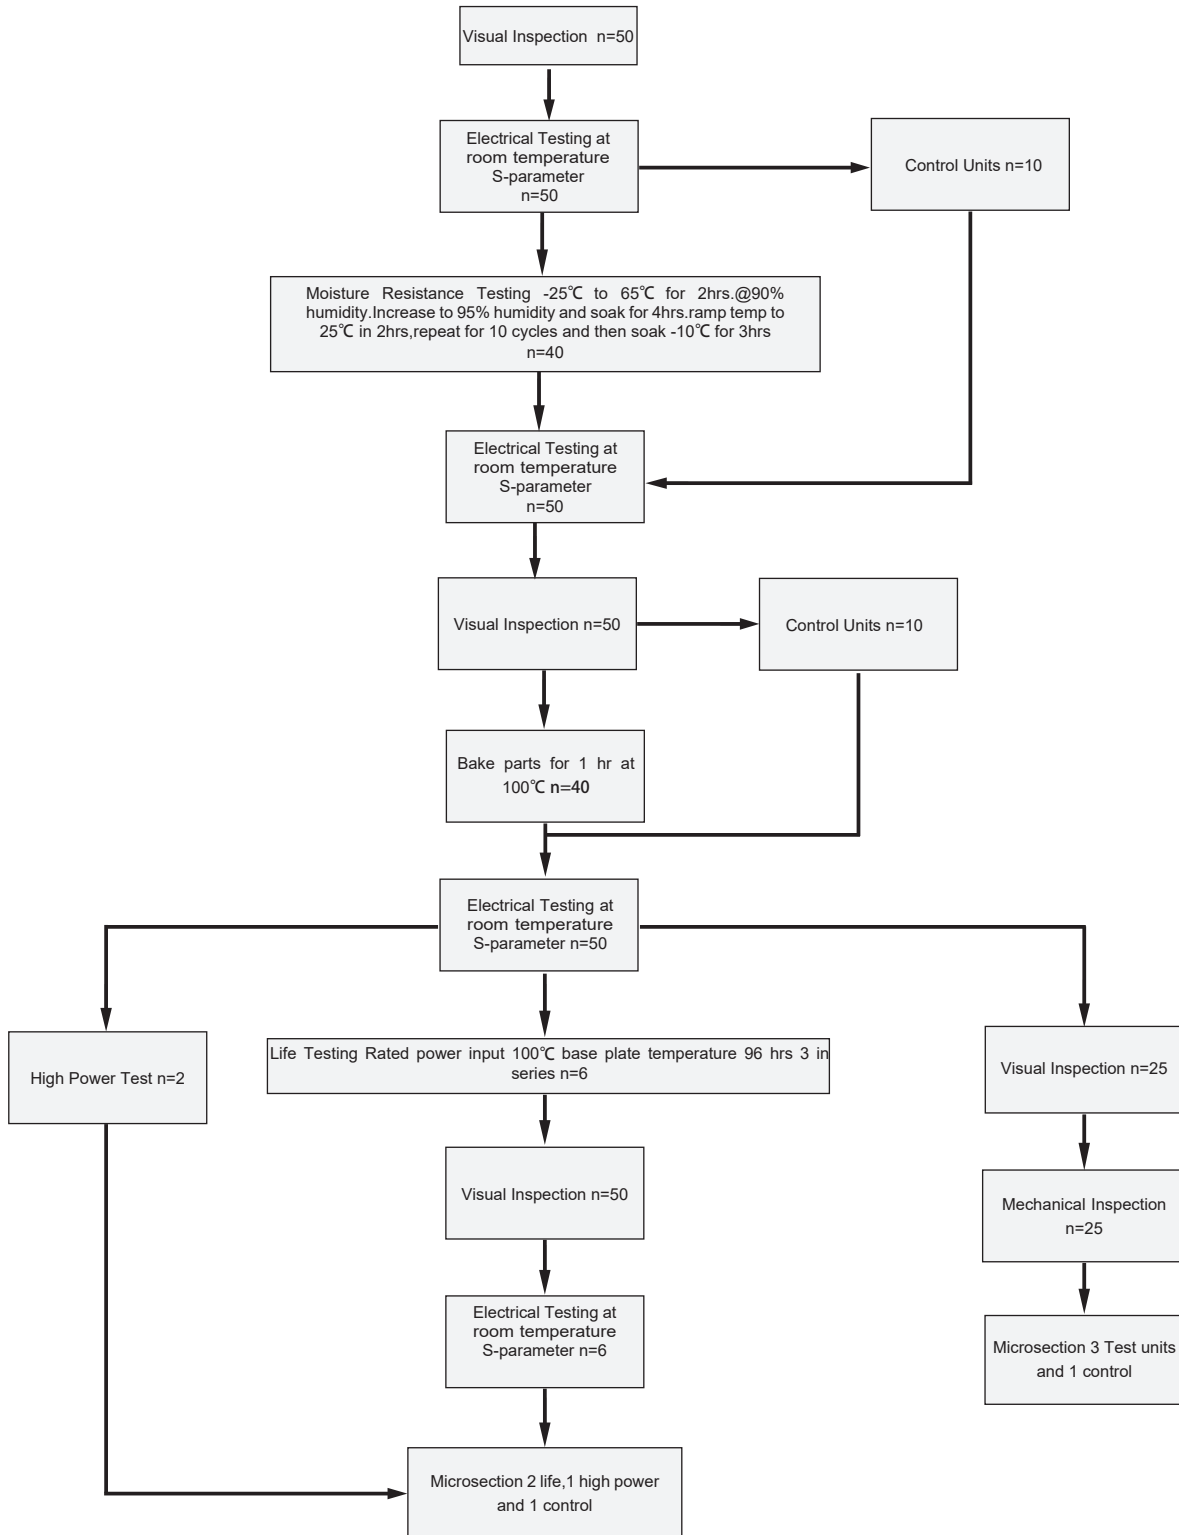

### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)