


### Description

The DC53T20 is a low cost, low profile sub-miniature high performance 20 dB directional coupler in a new easy to use, manufacturing friendly surface mount package. It is designed for 4400 – 5500MHz applications including: LTE and 5G applications. The DC53T20 is designed particularly for power and frequency detection, as well as for return loss monitoring, where tightly controlled coupling and low insertion loss is required. It can be used in high power applications up to 10 Watts.

Parts have been subjected to rigorous qualification testing and they are manufactured using materials with coefficients of thermal expansion (CTE) compatible with common substrates such as FR4, G-10, RF-35, RO4003 and polyimide. Produced with 6 of 6 RoHS compliant ENIG finish.



### Features:

- 4400-5500 MHz
- 5G Applications
- High Power
- Very Low Loss
- High Directivity
- Production Friendly
- Tape and Reel
- RoHS Compliant
- Halogen Free


### Electrical Specifications

Frequency	Coupling	Directivity	Return Loss
<i>MHz</i>	<i>dB</i>	<i>dB Min</i>	<i>dB Min</i>
4400 - 5500	21 ±1.5	18	18.0
<b>Insertion Loss</b>	<b>Frequency Sensitivity</b>	<b>Power</b>	<b>Operating Temp.</b>
<i>dB Max</i>	<i>dB Max</i>	<i>Avg. CW Watts</i>	<i>°C</i>
0.25	±0.4	10	-55 to +125

### Notes:

1. All the above data are based on specified demo board.
2. Insertion loss: Thru board loss has been removed.

### Mechanical Outline

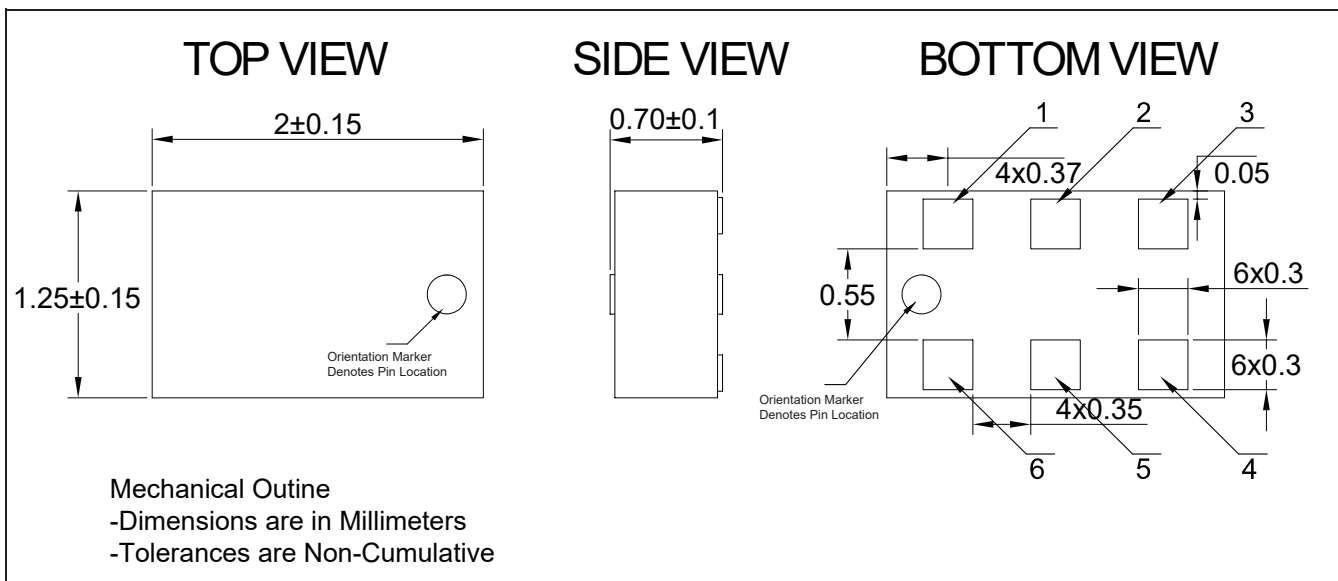


### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Directional Coupler Pin Configuration

The DC53T20 has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

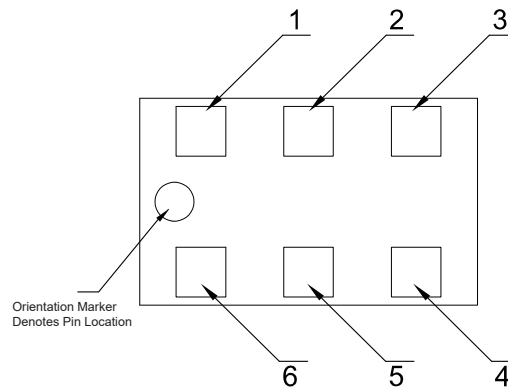

Pin	Configuration-1	Configuration-2
1	Input	Direct
2	Gnd	Gnd
3	Coupled	Isolated
4	Isolated	Coupled
5	Gnd	Gnd
6	Direct	Input

### Typical Performance Data (@25°C)


Frequency (MHz)	Coupling (dB)	Transmission (dB)	Insertion Loss (dB)	Directivity (dB)	Return Loss(dB)			
					S11	S22	S33	S44
4400	-21.75	-0.17	-0.14	-20.14	-18.79	-26.12	-26.05	-19.07
4455	-21.76	-0.17	-0.14	-20.06	-18.86	-26.17	-25.59	-19.03
4510	-21.73	-0.17	-0.14	-19.86	-18.57	-25.05	-25.18	-18.91
4565	-21.72	-0.16	-0.13	-20.50	-18.89	-25.08	-24.52	-19.18
4620	-21.72	-0.16	-0.13	-20.12	-18.91	-24.67	-24.44	-19.00
4675	-21.68	-0.16	-0.13	-19.89	-18.95	-24.61	-24.13	-19.15
4730	-21.69	-0.17	-0.14	-20.77	-18.98	-24.32	-24.02	-19.03
4785	-21.69	-0.16	-0.13	-20.40	-19.02	-24.19	-23.82	-19.07
4840	-21.72	-0.16	-0.13	-20.71	-19.25	-23.43	-23.22	-19.20
4895	-21.72	-0.16	-0.13	-20.25	-19.16	-23.08	-23.14	-19.41
4950	-21.72	-0.16	-0.13	-20.62	-19.73	-22.99	-22.76	-19.56
5005	-21.72	-0.16	-0.13	-20.26	-19.79	-22.58	-22.65	-19.63
5060	-21.78	-0.15	-0.12	-20.94	-19.92	-21.86	-22.03	-19.52
5115	-21.79	-0.15	-0.12	-20.68	-19.81	-21.82	-21.94	-19.64
5170	-21.82	-0.15	-0.12	-20.84	-20.38	-21.29	-21.53	-19.93
5225	-21.81	-0.14	-0.11	-20.39	-20.16	-21.12	-21.52	-19.84
5280	-21.86	-0.14	-0.11	-20.77	-20.73	-20.96	-21.03	-20.23
5335	-21.89	-0.14	-0.11	-21.45	-20.73	-21.02	-21.23	-20.07
5390	-22.02	-0.13	-0.11	-21.98	-21.34	-21.06	-20.96	-20.59
5445	-22.02	-0.12	-0.10	-21.21	-21.56	-21.06	-21.41	-20.65
5500	-22.06	-0.12	-0.09	-22.15	-22.61	-21.55	-21.26	-21.99

### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

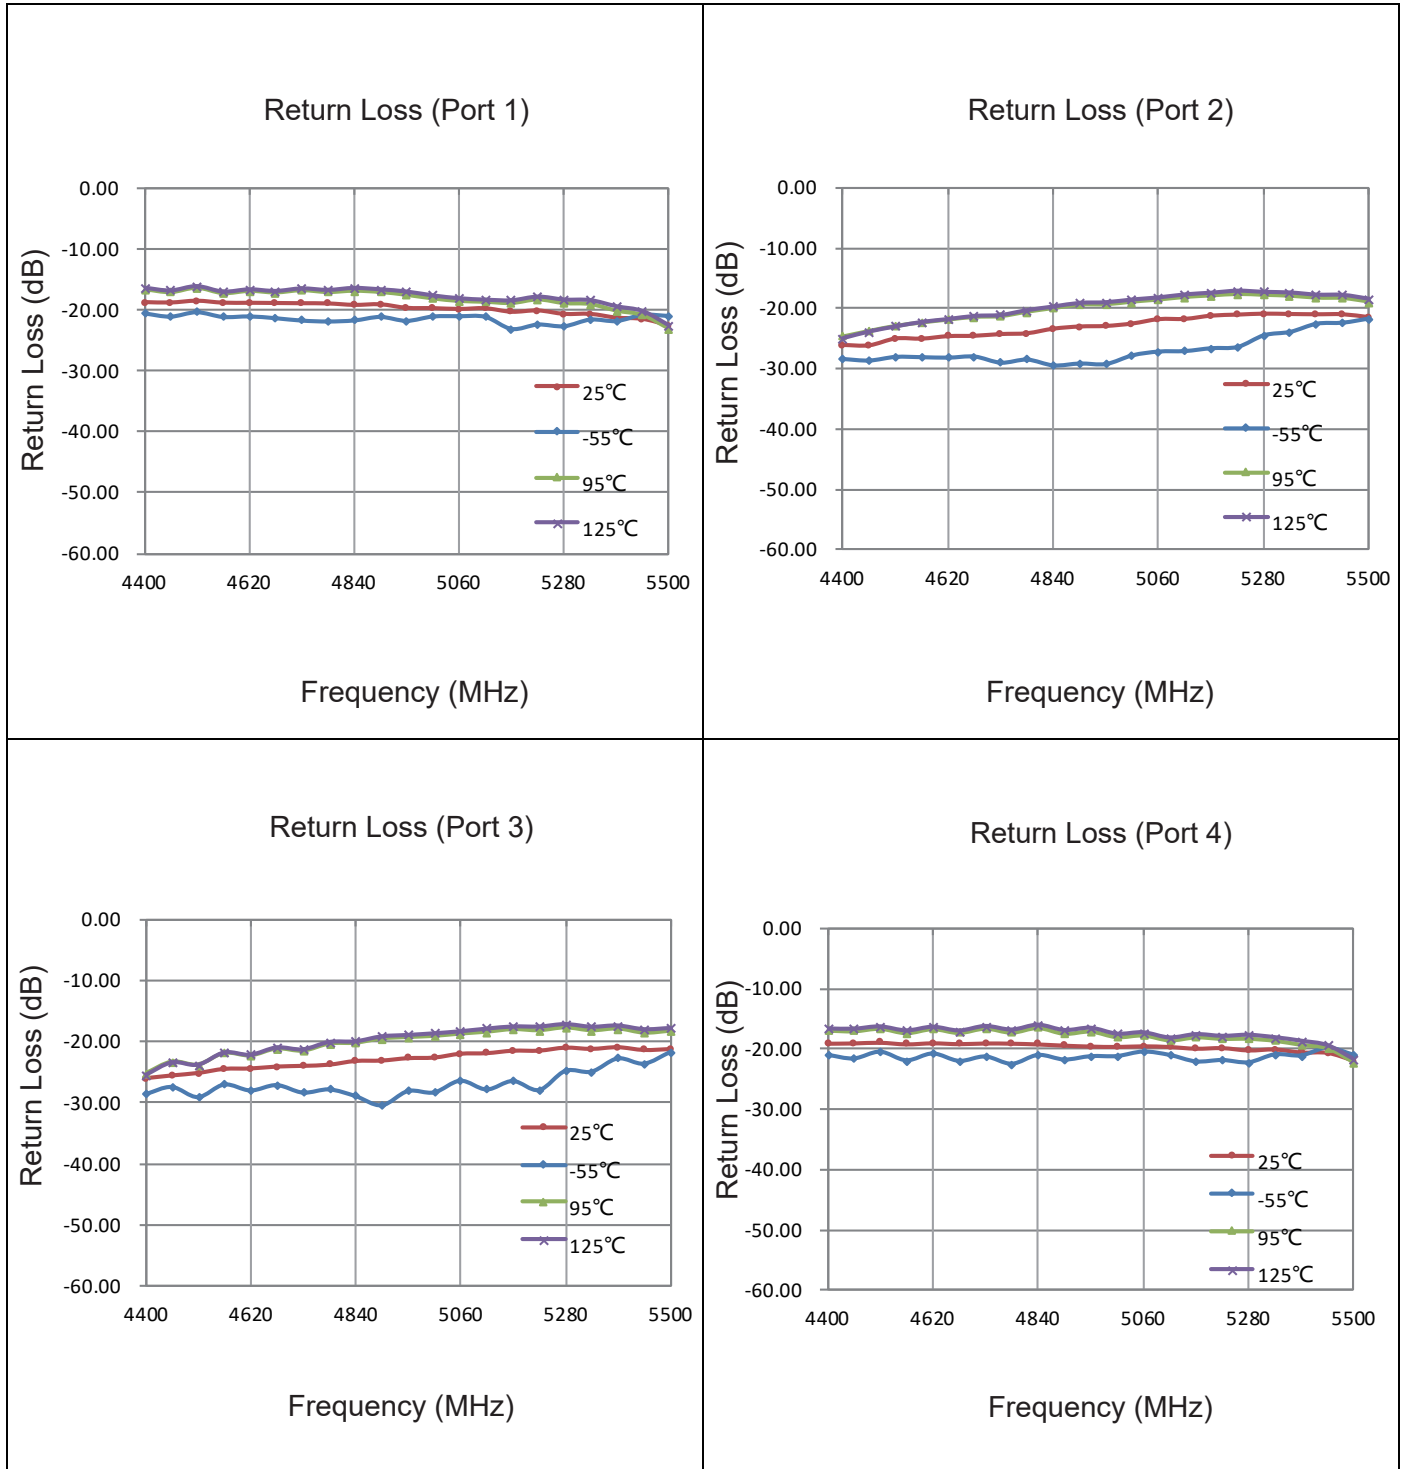
**Typical Performance (-55°C,25°C,95°C,125°C: 4400-5500 MHz)**

**Yantel Corporation**

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

 For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)
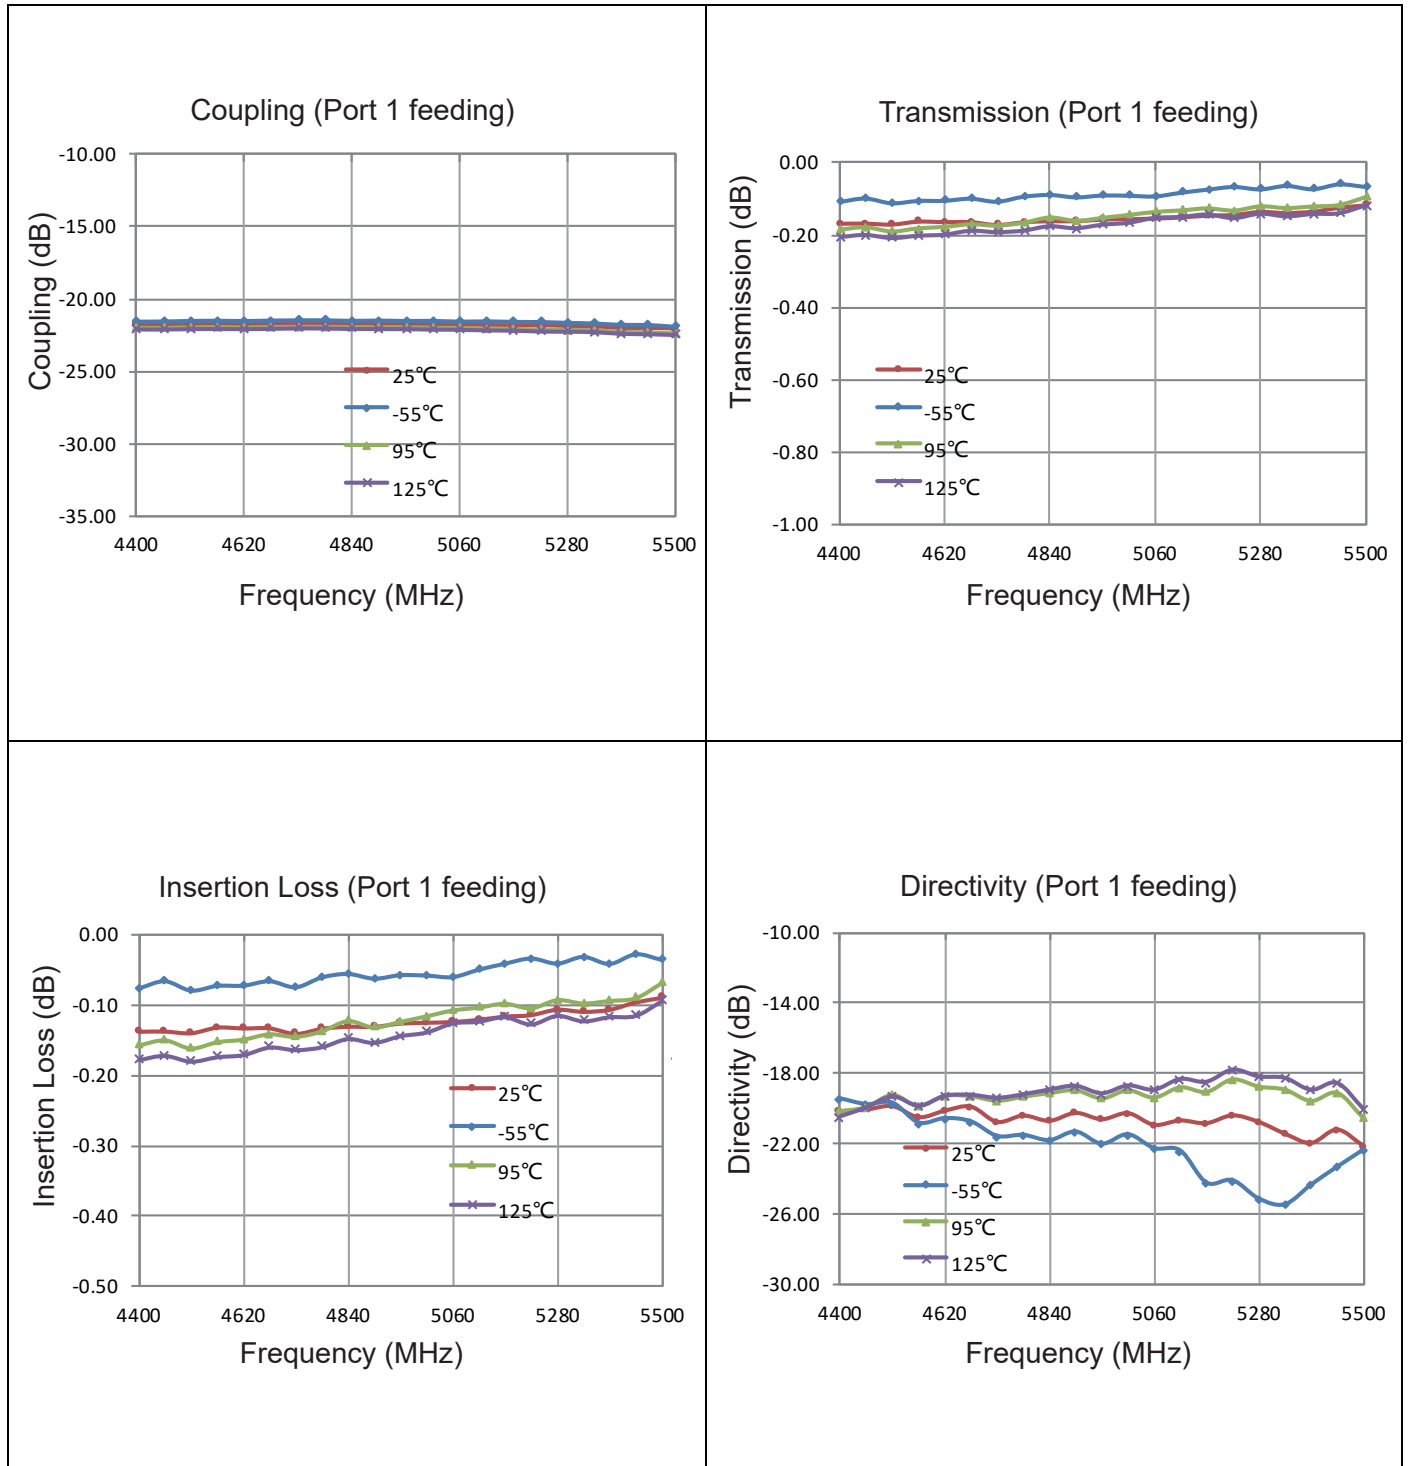
### Typical Performance (-55°C,25°C,95°C,125°C: 4400-5500 MHz)



### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

 For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Definition of Measured Specifications

Parameter	Definition	Mathematical Representation
<b>VSWR</b> (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50Ω system. A VSWR of 1:1 is optimal.	$VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave
<b>Return Loss</b>	The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR.	$\text{Return Loss (dB)} = 20 \log \frac{VSWR + 1}{VSWR - 1}$
<b>Insertion Loss</b>	The input power divided by the sum of the power at the two output ports.	$\text{Insertion Loss(dB)} = 10 \log \frac{P_{in}}{P_{cpl} + P_{transmission}}$
<b>Isolation</b>	The input power divided by the power at the isolated port.	$\text{Isolation(dB)} = 10 \log \frac{P_{in}}{P_{iso}}$
<b>Phase Balance</b>	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmission port
<b>Amplitude Balance</b>	The power at each output divided by the average power of the two outputs.	$10 \log \frac{P_{cpl}}{\left(\frac{P_{cpl} + P_{transmission}}{2}\right)} \quad \text{or} \quad 10 \log \frac{P_{transmission}}{\left(\frac{P_{cpl} + P_{transmission}}{2}\right)}$


### Test Method

1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of coupling through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of isolation through port 1 to port 2(S21).
6. Measure the data of phase port 4 & port 3(port 1 feeding).
7. Measure the data of return loss port 1, port 2, port 3 & port 4.
8. According to the above data to calculate insertion loss, amplitude balance & phase.


### Note:

1. When calculating insertion loss at room temperature, demo board loss should be removed from both coupling & transmission data. Please refer to the below table for demo board loss :

Frequency Range(MHz)	Demo Board Loss (dB) @25°C
<b>470-860</b>	0.07
<b>800-1000</b>	0.10
<b>1200-1700</b>	0.15
<b>1700-2000</b>	0.15
<b>2000-2300</b>	0.20
<b>2300-3700</b>	0.25

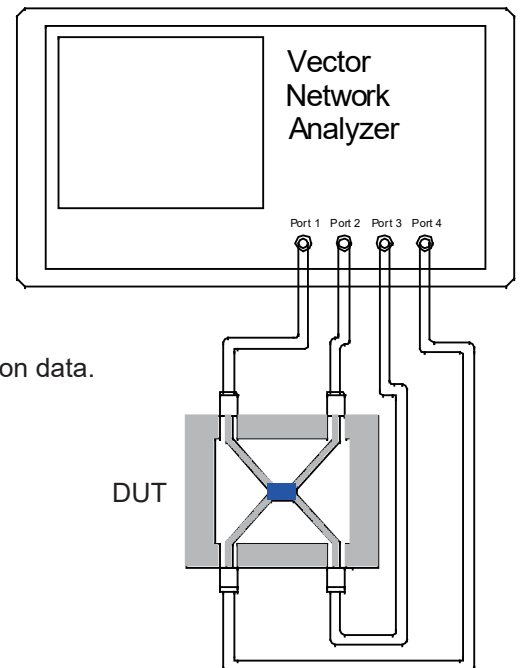


### Recommended PCB Layout

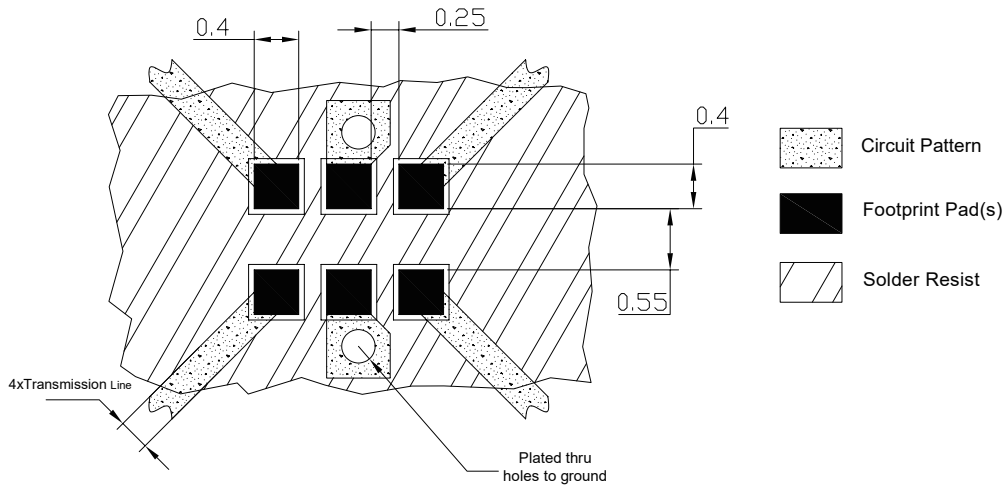

#### NOTE:

1. 50Ω line width is shown above designing.
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm [inch].

### Reflow Profile

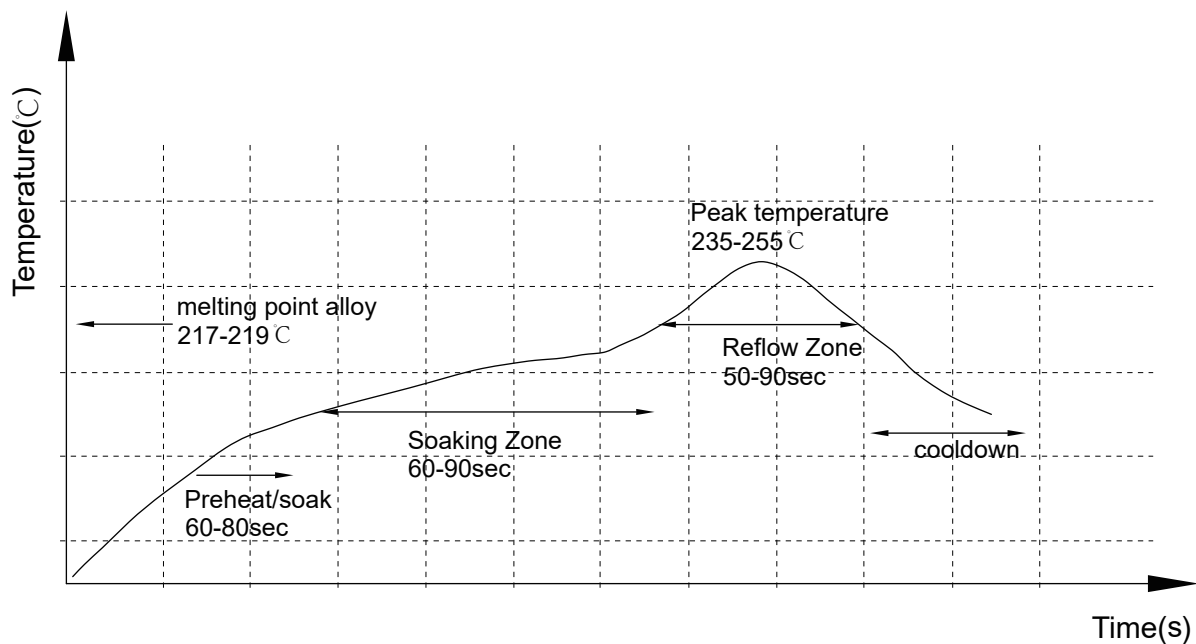


### Yantel Corporation


Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Reliability Test Flow

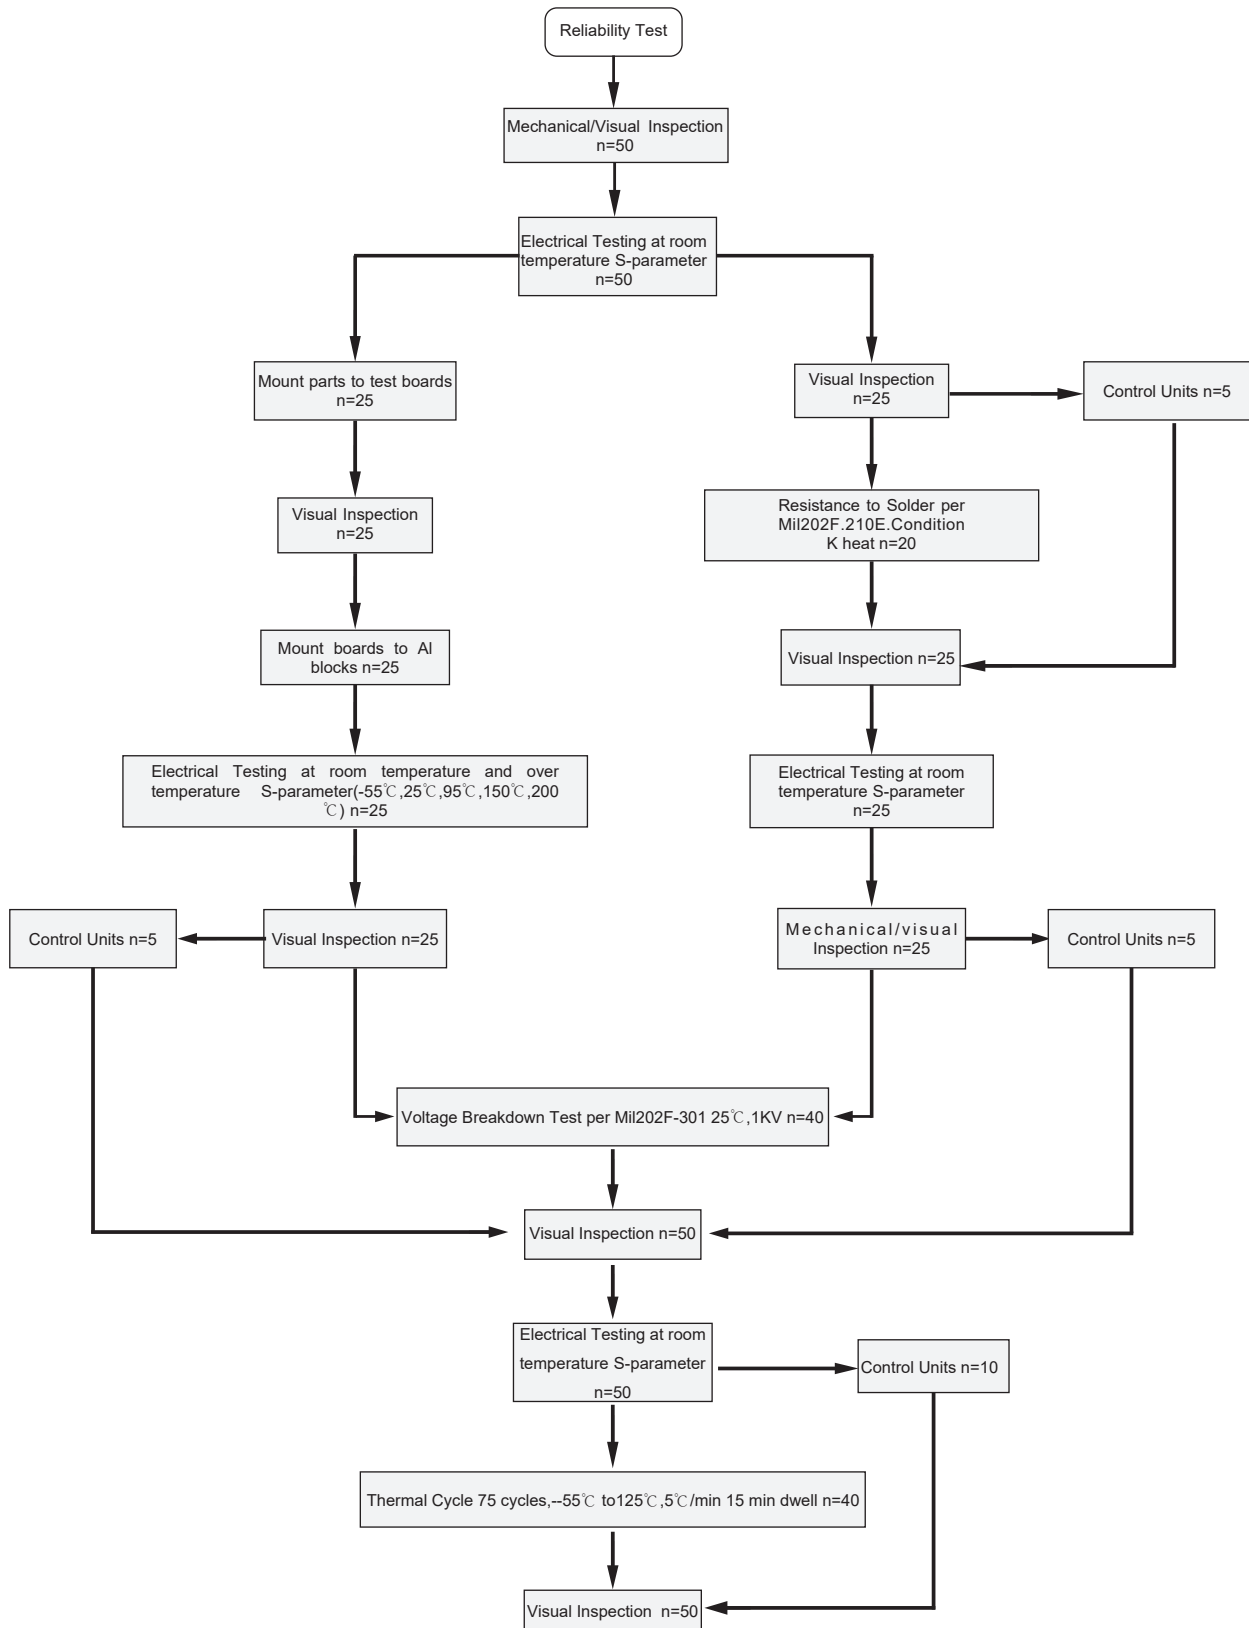


### Reliability Test Flow

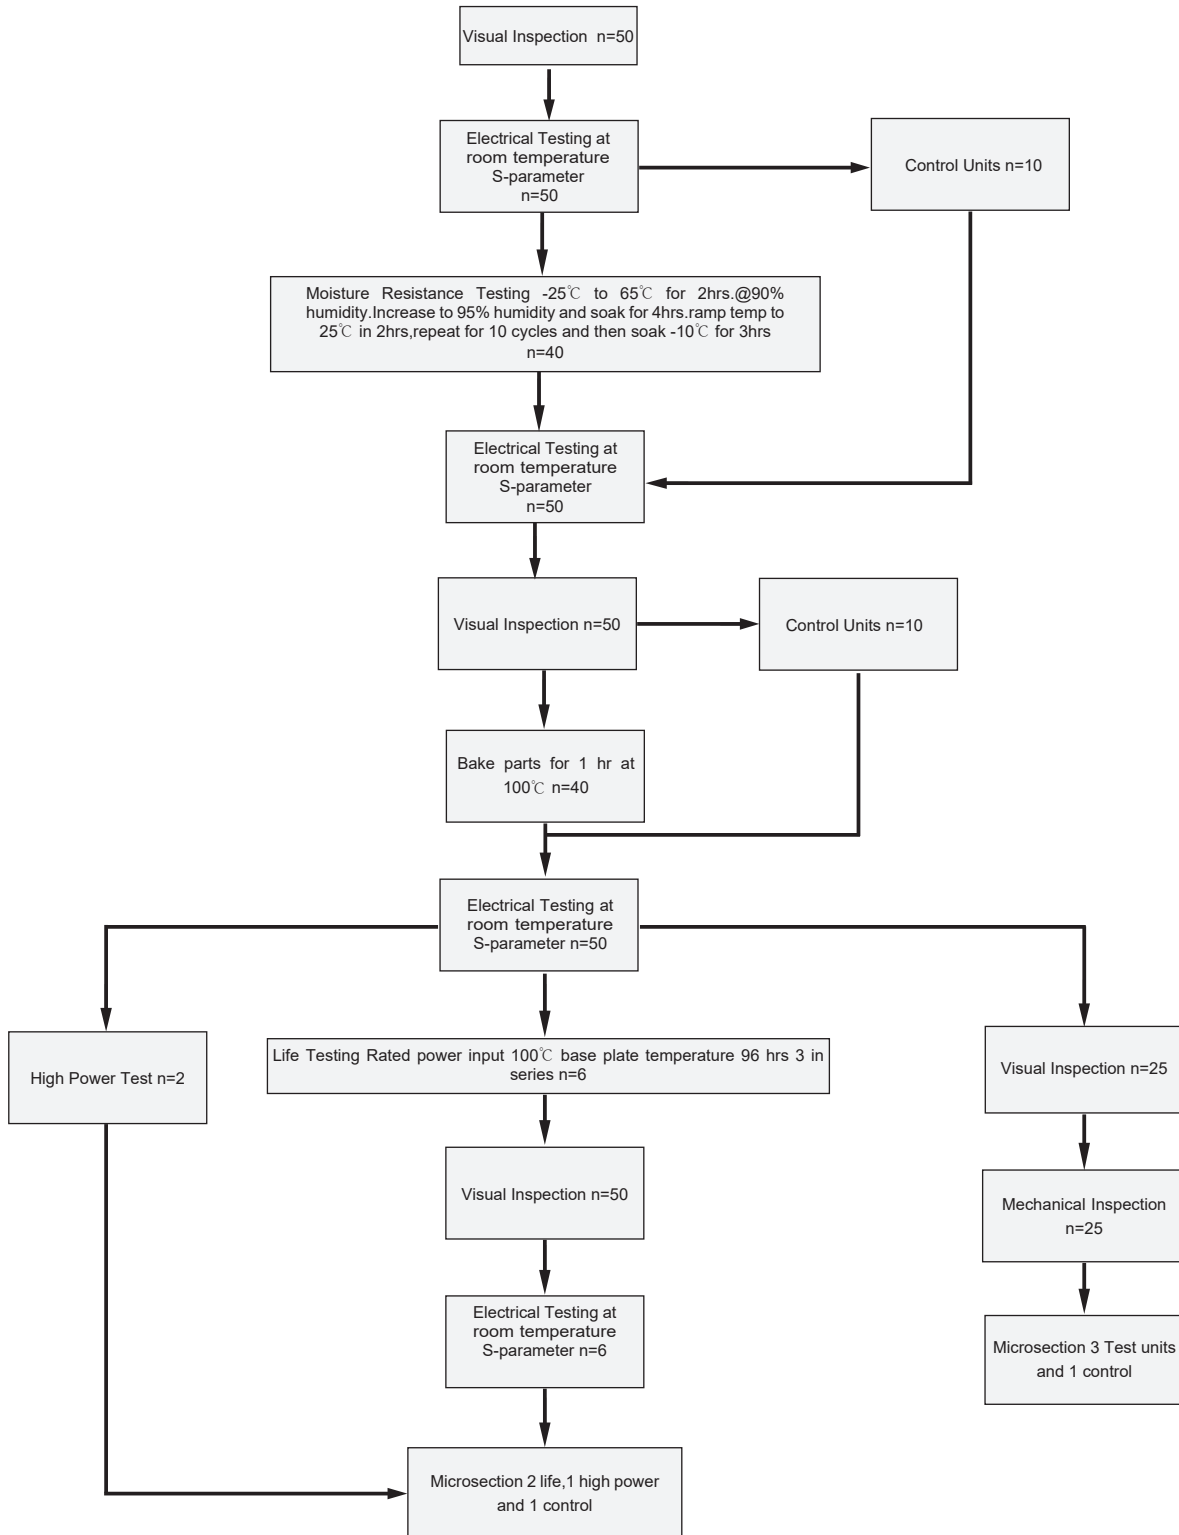



### Tape and Reel Drawing


Feeding Direction

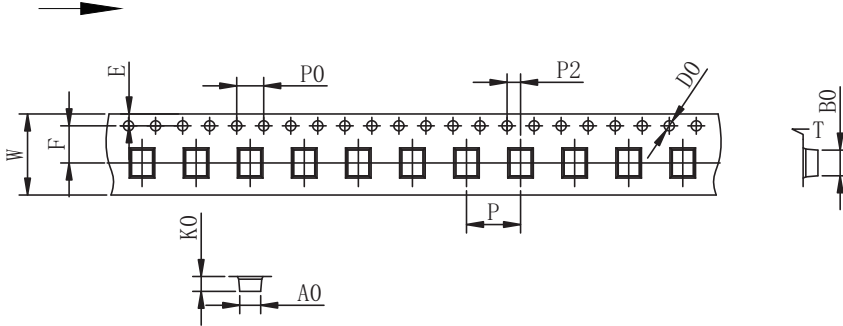


ITEM	W	A0	B0	K0	K1	P	F	E	D0	P0	P2	t	7"
DIM(mm)	8.0	1.45	2.30	1.00		4.0	3.5	1.75	1.5	4.0	2.0	0.2	P/R
TOLE	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	4000pcs

Notice:

- A. 10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.
- F. Material: PE 100
- G. Thickness: 0.20±0.05mm
- H. 4000 units (maximum) / T&R

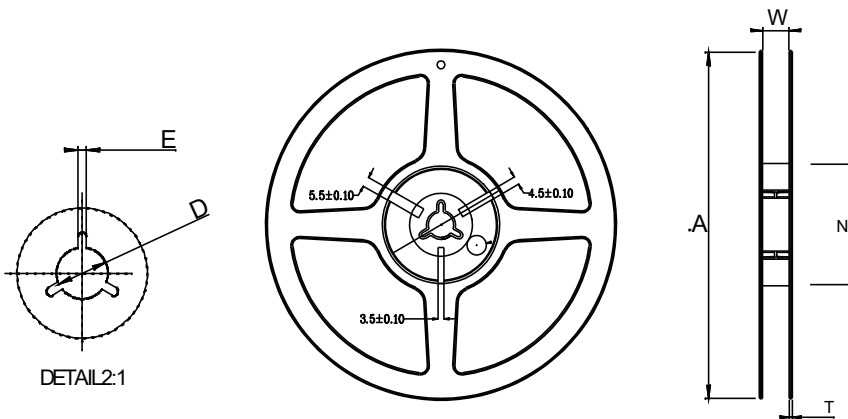

Symbol	Dimensions(mm)
W	9.0±0.4
A	180±0.3
N	60±0.3
T	1.4±0.2
E	3±0.5
D	25±0.8

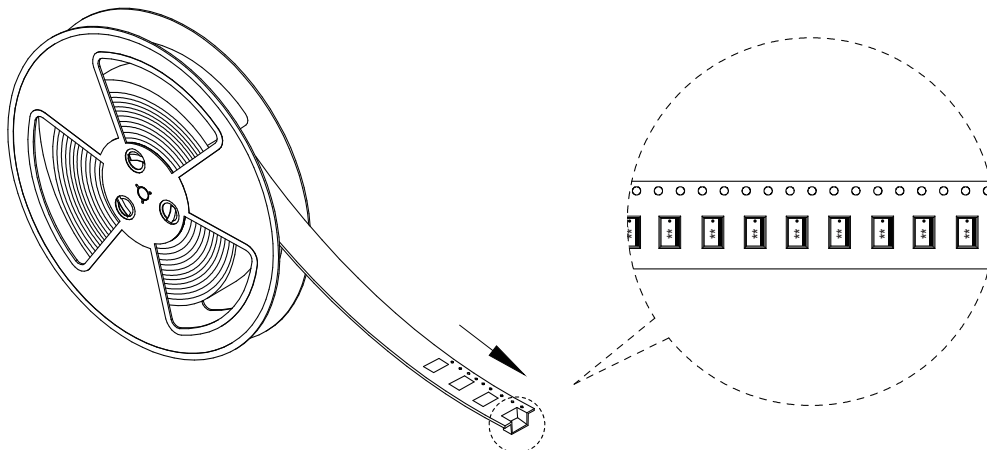

### Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

 For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)