

Manual Step Attenuator

- ◆ DC to 5.8GHz
- ◆ 0 to 15dB in 1dB Step
- ◆ 2 Watt
- ◆ Choice of SMA or N Type Connectors




Features

- Using advanced microstrip technology, ultra-small size
- Attenuation values are adjustable in a power-on state, no sudden big reflection.
It adopts an innovative technology, and thus it eliminates sudden big reflection in attenuators when attenuation is being adjusted, preventing the preliminary RF circuit from being burnt, and keeping the system stable
- Step attenuation: 1dB, 2dB, 4dB, 8dB
- 16 attenuation values
- High attenuation accuracy, low insertion loss
- High adjustment accuracy
- Low cost – High Performance
- Adjusting the transmitting (receiving) distance of RF signal precisely. Adjusting accuracy is limited to 5cm.
- Switch repeatability avg.> 10000 operations (5000 cycles) per switch.
- PC(Polycarbonate) Switch, operating temperature of 120°C is available.
- Attenuation values are adjustable in a power-on state, test data can be read continuously, no interruption.

Characteristic

For example the testing curves of VAS061501S22 of 12dB

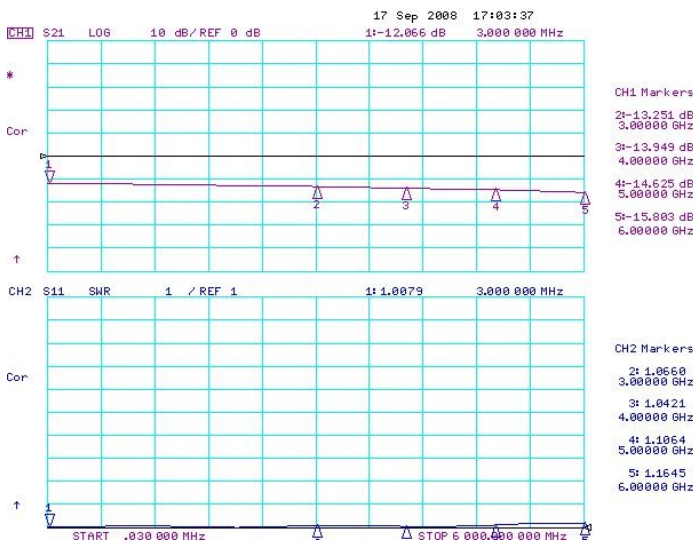

Specifications

| | |
|-------------------------------------|--|
| Frequency Range | DC to 5.8GHz |
| Attenuation | 0 to 15dB |
| Step Value | 1dB |
| Insertion loss at 0dB (typ.) | 0.45dB at 1 GHz 0.55dB at 2 GHz 1.50dB at 3 GHz 1.80dB at 4 GHz 2.0dB at 5 GHz 2.50dB at 5.8GHz |

Attenuation Accuracy (typ.)

| |
|-------------------------|
| -0.2 to +0.50dB at 1GHz |
| 0 to +0.85dB at 2GHz |
| 0 to +1.55dB at 3GHz |
| 0 to +2.50dB at 4GHz |
| 0 to +4.0dB at 5GHz |
| 0 to +5.5dB at 5.8GHz |

| | |
|------------------------------|----------------|
| Nominal Impedance | 50 Ohm |
| Average Power | 2 Watt |
| Operating Temperature | -40°C to +85°C |

| Freq. Range (GHz) | VSWR(:1) | |
|----------------------|----------|------|
| | Typ. | Max. |
| DC to 4 | 1.15 | 1.4 |
| 4 to 5.8 | 1.35 | 1.6 |

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Model No. Description

VAS ** ** ** * * *
 Type Attenuation Range Step Value Connector Type Max. Power Connector Option

VAS: Step Variable Attenuator

Type: 06 represents type number

Attenuation Range: Maximum attenuation.

Connector Type: S and N available. S is SMA and N is N type connector.

Max. Power: 2 and 5 are available, currently 2W and 5W are available.


Connector Options:

| Options | IO |
|---------|---------------|
| 1 | Female/Female |
| 2 | Male/Female |
| 3 | Male/Male |

Connector Position: "A" represents back connectors, without "A" represents left and right connectors.


Package Outlines

SMA Connector Unit:mm(inch)

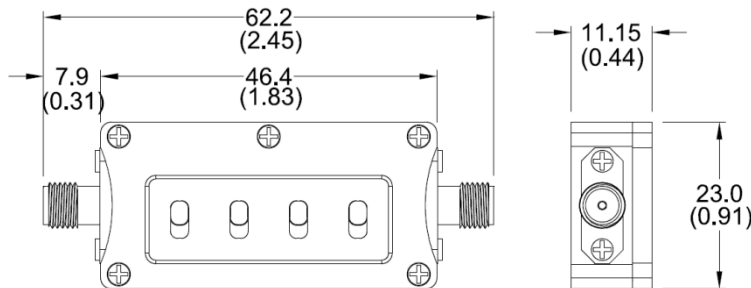

Package type: S21, Net weight: 24.3g

N-type Connector

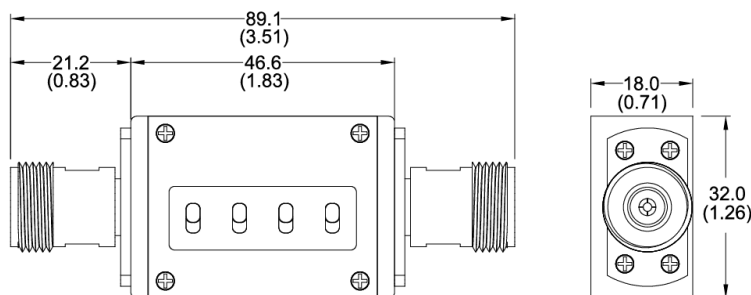

Package type: N21, Net weight: 78.8 g


NOTE:

1. ALL dimensions shown in mm(tolerance: +/-0.2mm) unless stated otherwise
2. RoHS Compliant in accordance with EU Directive(2011/65/EU)


Mounting Instructions: Unit: mm(inch)

This product is panel-mountable via screws.


- Four mounting holes on the product plate. Refer to Fig2, Fig6.
- H represents the thickness of panel. Refer to Fig3, Fig4.
- Recommended length of the screw is 3mm+H. Refer to Fig5.

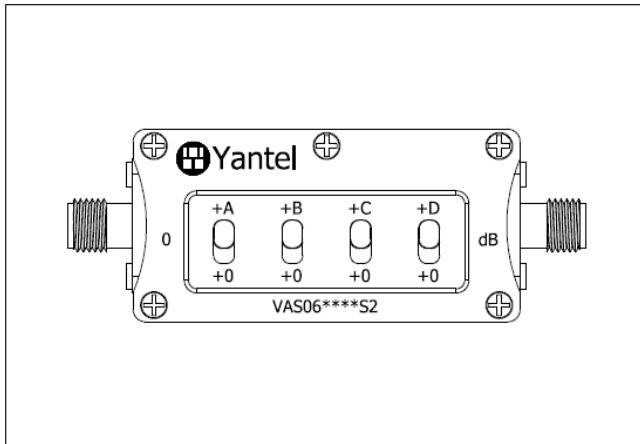


Front View Fig 2

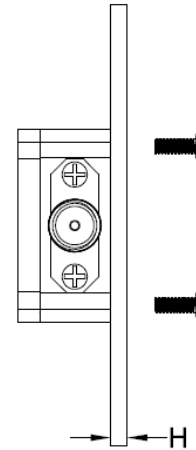


Lateral View Fig 3

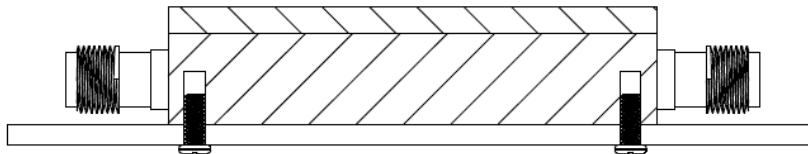

Sectional View Fig 4

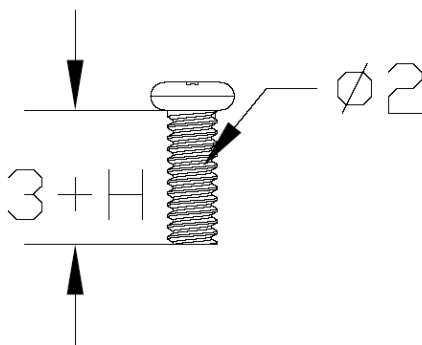

Recommended length of the screw Fig 5

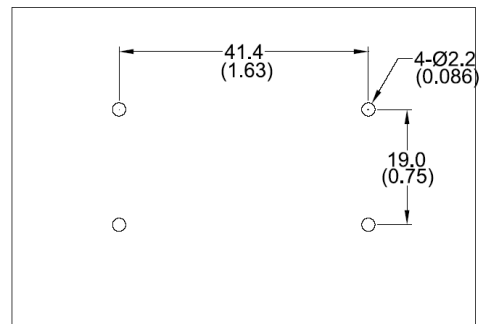

Mounting holes on user's panel Fig 6

Note:

Attempt to disassemble the product can damage it and void your warranty. In case of any malfunction, please contact your local representative, distributor or the factory immediately.

Attention

It is much easier to adjust the switch by tools like plastic screw driver.