


### Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process

### Specifications


| NO. | Parameter                        | Frequency (MHz) | SPEC |      |
|-----|----------------------------------|-----------------|------|------|
|     |                                  |                 | Min. | Max. |
| 1   | Insertion Loss (dB)              | 840             |      | -    |
| 2   | Ripple                           | 740~940         |      | 1.6  |
| 2   | Attenuation (dB)                 | 640             | 45   |      |
|     |                                  | 1040            | 45   |      |
| 3   | VSWR                             | 740~940         |      | 2.0  |
| 4   | In/Output Impedance ( $\Omega$ ) |                 | 50   |      |

### Construction

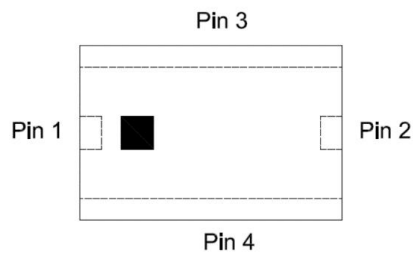

| PIN | Connection  |
|-----|-------------|
| 1   | Input Port  |
| 2   | Output Port |
| 3   | GND         |
| 4   | GND         |


### Mounting Considerations

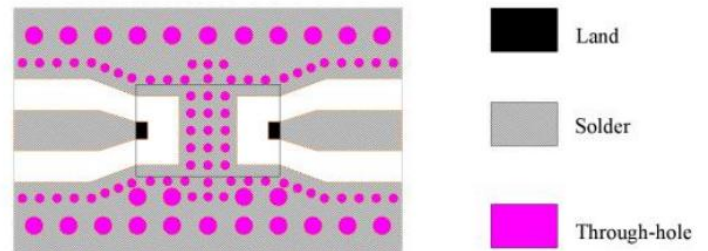

Unit: mm

Line width to be designed to match 50  $\Omega$  characteristic impedance, depending on PCB material and thickness

### Dimensions
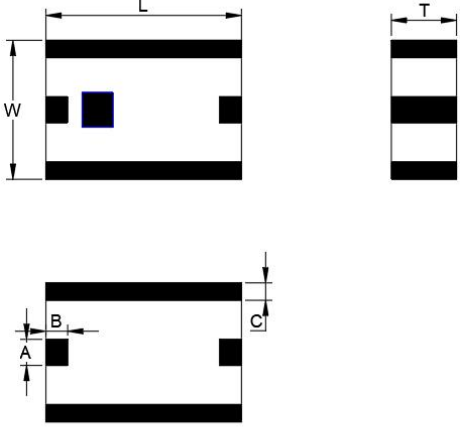
| Figure  | Symbol | Dimension (mm) |
|---|--------|----------------|
|  | L      | 5.0±0.20       |
|   | W      | 3.2±0.20       |
|   | T      | 2.0±0.20       |
|   | A      | 0.60±0.10      |
|   | B      | 0.40±0.10      |
|   | C      | 0.4±0.10       |

### Typical Electrical Characteristics (T=25°C)




### Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

### Solder Reflow Standard Conditioning

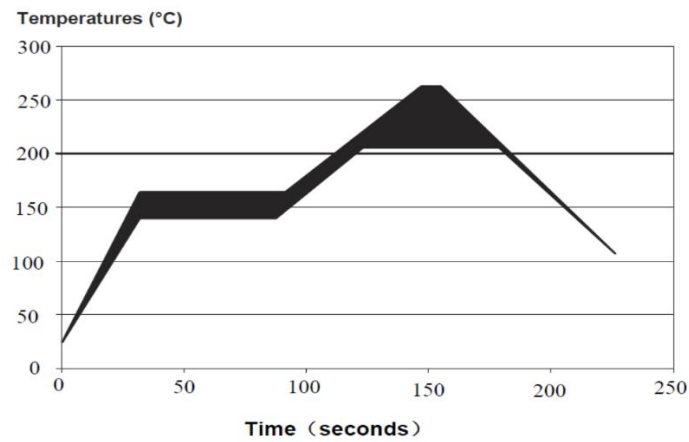

### Storage Conditions

Temperature : +5 to +30 °C

Humidity : 20 to 70% RH

Term of storage : Within 12 months (After the delivery) \*

Baking : Unnecessary

\* After peeling off cover tape, do not keep exposing the products to the open air. For the products stored longer than 12 months, confirm their terminals and solderability before use.