## 2711 SMD RF Manual Tunable Inductor

Patent product

### SMD RF Manual Tunable Inductor 2711

◆ Operated frequency: 15~200 MHz Q value: 71(no core), 47(full core)

**Inductance tuning range: 271 to 360(nH)** 

**Core material: Aluminum** 

SRF: 310MHz

Operating temperature: -40 ~+125

**Rotation times(min): 100** 




- SMD package
- High temperature resistance, operating reliably from -40 ~125 and in other harsh environment
- Hermetic microstrip circuit, reliable and stable over temperature and humidity
- High Q value, linear tunable, available in increasing or decreasing inductance
- Built with advanced multi-layer processing, high consistence and high reliabilit -y in manufacturing, contributing to good consistence in tuning resonant circuit •
- Anti-interference with non-magnetic core, no interference with other devices
- Small size:  $6 \times 6 \times 2.5$  (mm)
- Termination leads: RoHS compliant, tin or gold over copper
- Low cost, high performance

### **Applications**

- Super Regenerative Receiver Module
- RF Impedance Matching
- **Tunable Antennas**
- **Tuning Resonant Circuit**
- Tunable Filter
- Phase Shifter
- Phased Array Radar
- MRI(Magnetic Resonance Imaging)
- NMR(Nuclear Magnetic Resonance)
- Crystal Oscillator
- **Broadband Antenna**

### Characteristic

Typical Q and L vs frequency

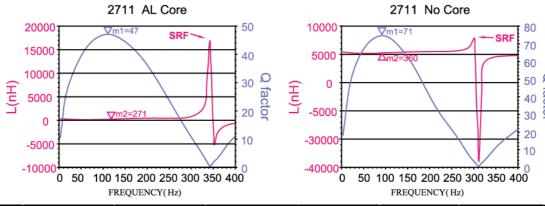


型号	No core		At L max		At L min		Freq at max	Freq Range	No core SRF	Irms
	L(nH)	Qmin	L(nH)	Qmin	L(nH)	Qmin	Q (MHz)	at 1/2 Qmax	min(MHz)	(A)
2711	360	71	360	71	271	47	100	15~200	310	1.2

### **Notes:**

Operating frequency is based on the half of the maximum Q value.

# SMD RF Manual Tunable Inductor Patent product

### Inductance VS The height of the core rotation

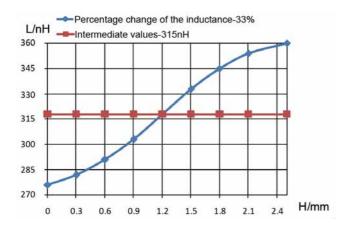


### **Notes**

- H represents the height of Al core rotation, H max=2.5mm.
- 2. Inductance changes around the intermediate value.


### **Package Outlines**

All dimensions shown in mm unless stated otherwise

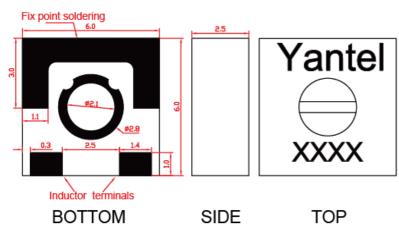

### **Recommended Layout**

All dimensions shown in mm unless stated otherwise

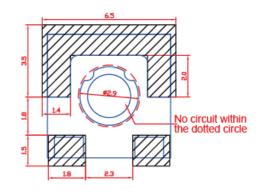

### **Tape and Reel Drawing**

