


### Manual Step Attenuator

- ◆ DC to 5.8GHz
- ◆ 0 to 35dB in 1dB Step
- ◆ 5 Watt
- ◆ Connector Type: SMA,N,TNC,F,BNC etc. available

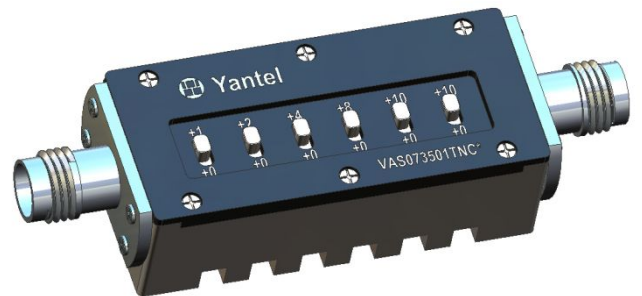

### Features

- Using advanced microstrip technology, ultra-small size
- Attenuation values are adjustable in a power-on state, no sudden big reflection.  
It adopts an innovative technology, and thus it eliminates sudden big reflection in attenuators when attenuation is being adjusted, preventing the preliminary RF circuit from being burnt, and keeping the system stable
- Step values: 1dB, 2dB, 4dB, 8dB,10dB,10dB
- 36 attenuation values
- High attenuation accuracy, low insertion loss
- High adjustment accuracy
- Low cost – High Performance
- Adjusting the transmitting (receiving) distance of RF signal precisely. Adjusting accuracy is limited to 5cm.
- Switch repeatability avg.> 10000 operations (5000 cycles) per switch.
- PC(Polycarbonate) Switch, operating temperature of 120°C is available.
- Attenuation values are adjustable in a power-on state, test data can be read continuously, no interruption.



### Specifications

<b>Frequency Range</b>	DC to 5.8GHz
<b>Attenuation</b>	0 to 35dB
<b>Step Value</b>	1dB
<b>Insertion loss at 0dB (typ.)</b>	
	1.4dB DC to 4 GHz
	2.0dB 4 to 5 GHz
	2.5dB 5 to 5.8 GHz

### Attenuation Accuracy (typ.)


-1 dB~+3.5dB	DC to 4 GHz
+5.5 dB	4 to 5 GHz
+7.0dB	5 to 5.8 GHz

### Nominal Impedance

50 Ohm	
<b>Average Power</b>	5 Watt
<b>Operating Temperature</b>	-40°C to +85°C

### Characteristic

For example the testing curves of VAS073501T52 of 35dB

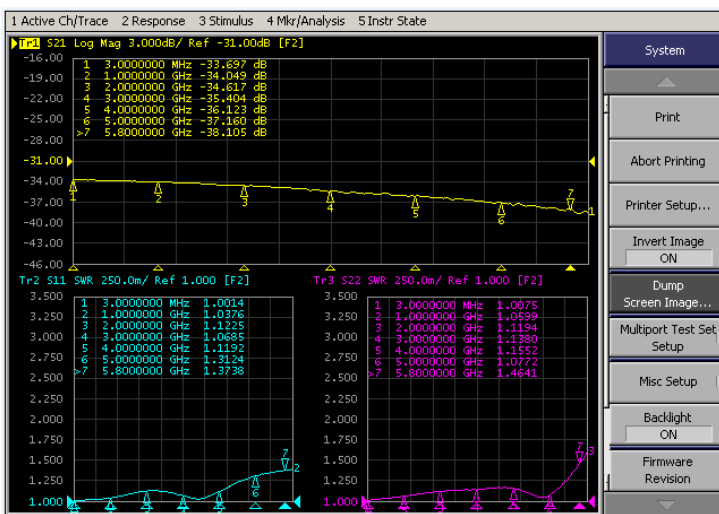

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 4	1.25	1.55
4 to 5.8	1.35	1.65

### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

### Model No. Description

VAS                      \*\*                      \*\*                      \*\*                      \*                      \*                      \*  
                                  Type                      Attenuation Range                      Step Value                      Connector Type                      Max. Power                      Connector Option

**VAS:** Step Variable Attenuator

**Type:** 07 represents type number

**Attenuation Range:** Maximum attenuation.

**Connector Type:** S and N and T available. S is SMA and N is N type connector and T is TNC.

**Max. Power:** 2 and 5 are available, currently 2W and 5W are available.


### Connector Options:

Options	IO
1	Female/Female
2	Male/Female
3	Male/Male

**Connector Position:** "A" represents back connectors, without "A" represents left and right connectors.

### Package Outlines

**TNC Connector Unit: mm(inch)**

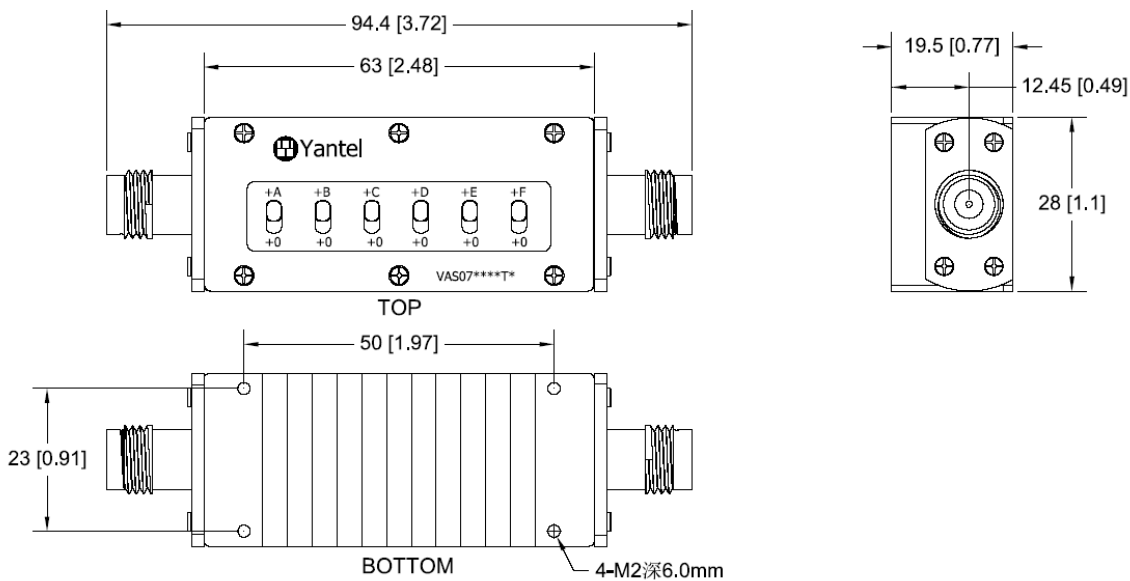

**Package type: T51**

### NOTE:

1. ALL dimensions shown in mm(tolerance: +/-0.2mm) unless stated otherwise
2. RoHS Compliant in accordance with EU Directive(2011/65/EU)

### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533


**Attention**


It is much easier to adjust the switch by tools like plastic screw driver.


**Mounting Instructions: Unit: mm(inch)**

This product is panel-mountable via screws.

- Four mounting holes on the product plate. Refer to Fig2, Fig6.
- H represents the thickness of panel. Refer to Fig3, Fig4.
- Recommended length of the screw is 3mm+H. Refer to Fig5.

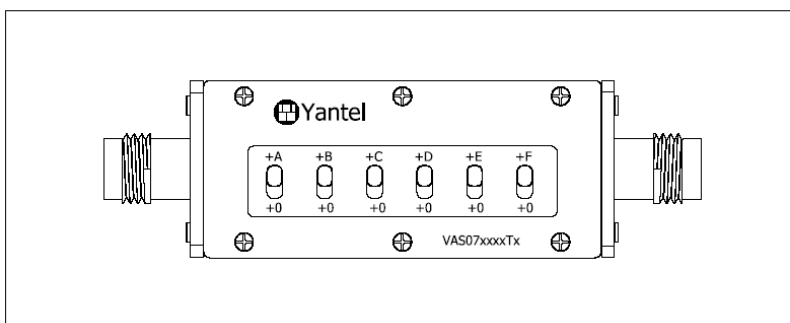


**Front View Fig 2**

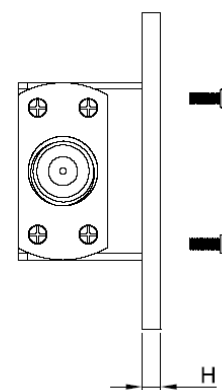


**Lateral View Fig 3**

**Yantel Corporation**


Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

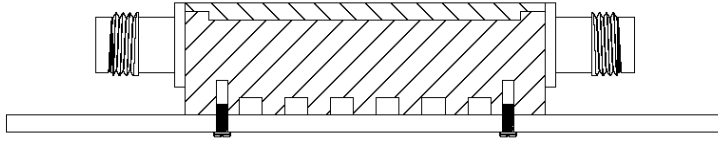

**Sectional View Fig 4**

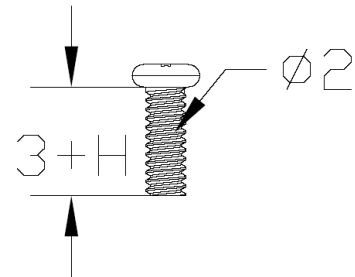

**Recommended length of the screw Fig 5**

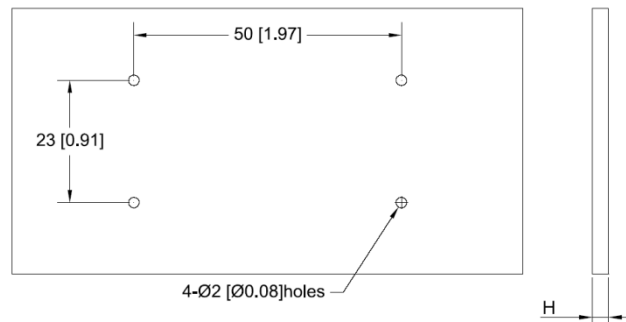

**Mounting holes on user's panel Fig 6**

**Note:**

Attempt to disassemble the product can damage it and void your warranty. In case of any malfunction, please contact your local representative, distributor or the factory immediately.