

### Manual Step Attenuator



- ◆ DC to 5.8GHz
- ◆ 0 to 72 in 3dB Step
- ◆ 2 Watt
- ◆ Connector Type: SMA,N,TNC,F,BNC etc. available

### Features

- Using advanced microstrip technology, ultra-small size
- Attenuation values are adjustable in a power-on state, no sudden big reflection.  
It adopts an innovative technology, and thus it eliminates sudden big reflection in attenuators when attenuation is being adjusted, preventing the preliminary RF circuit from being burnt, and keeping the system stable
- Step values 3dB, 6dB, 9dB, 9dB,9dB,9dB,9dB,9dB,9dB
- 25 attenuation values
- High attenuation accuracy, low insertion loss
- High adjustment accuracy
- Low cost – High Performance
- Adjusting the transmitting (receiving) distance of RF signal precisely. Adjusting accuracy is limited to 5cm.
- Switch repeatability avg.> 10000 operations (5000 cycles) per switch.
- PC(Polycarbonate) Switch, operating temperature of 120°C is available.
- Attenuation values are adjustable in a power-on state, test data can be read continuously, no interruption.

### Characteristic

For example the testing curves of VAS077203S2 of 72dB

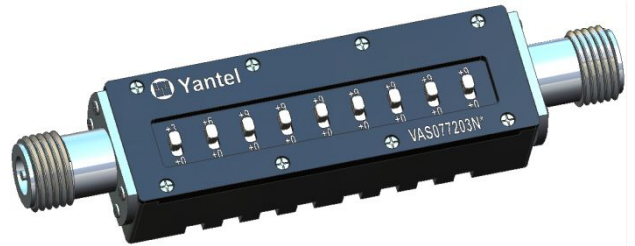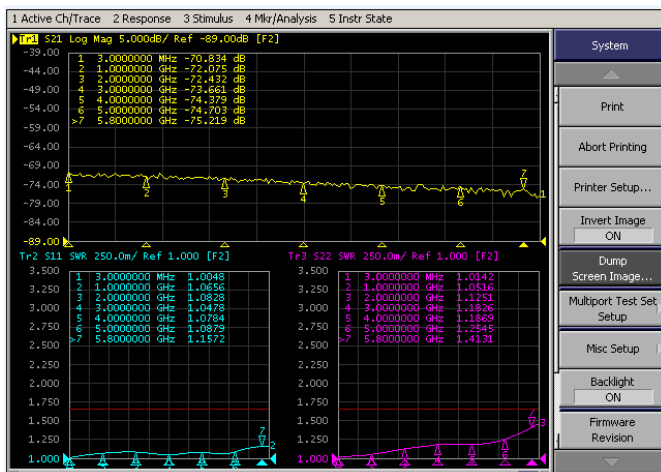

### Specifications

<b>Frequency Range</b>	DC to 5.8GHz
<b>Attenuation</b>	0 to 72dB
<b>Step Value</b>	3dB
<b>Insertion loss at 0dB (typ.)</b>	3.0dB in DC to 4GHz 4.6dB in 4GHz to 5GHz 5.5dB in 5GHz to 5.8GHz

### Attenuation Accuracy (typ.)

-1.3dB~3.5dB in DC to 4GHz
0dB~5.5 dB in 4GHz to 5GHz
0dB~6.5dB in 5GHz to 5.8GHz

<b>Nominal Impedance</b>	50 Ohm
<b>Average Power</b>	2 Watt
<b>Operating Temperature</b>	-40°C to +85°C

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 4	1.20	1.45
4 to 5.8	1.35	1.60

**Model No. Description**

VAS                      \*\*                        \*\*                        \*\*                        \*                        \*                        \*    
                                  Type                    Attenuation Range                    Step Value                    Connector Type                    Max. Power                    Connector Option

**VAS:** Step Variable Attenuator

**Type:** 07 represents type number

**Attenuation Range:** Maximum attenuation.

**Connector Type:** S and N available. S is SMA and N is N type connector.

**Max. Power:** 2 and 5 are available, currently 2W and 5W are available.


**Connector Options:**

Options	IO
1	Female/Female
2	Male/Female
3	Male/Male

**Connector Position:** "A" represents back connectors, without "A" represents left and right connectors.

**Package Outlines**

**S-type Connector                    Unit:mm(inch)**

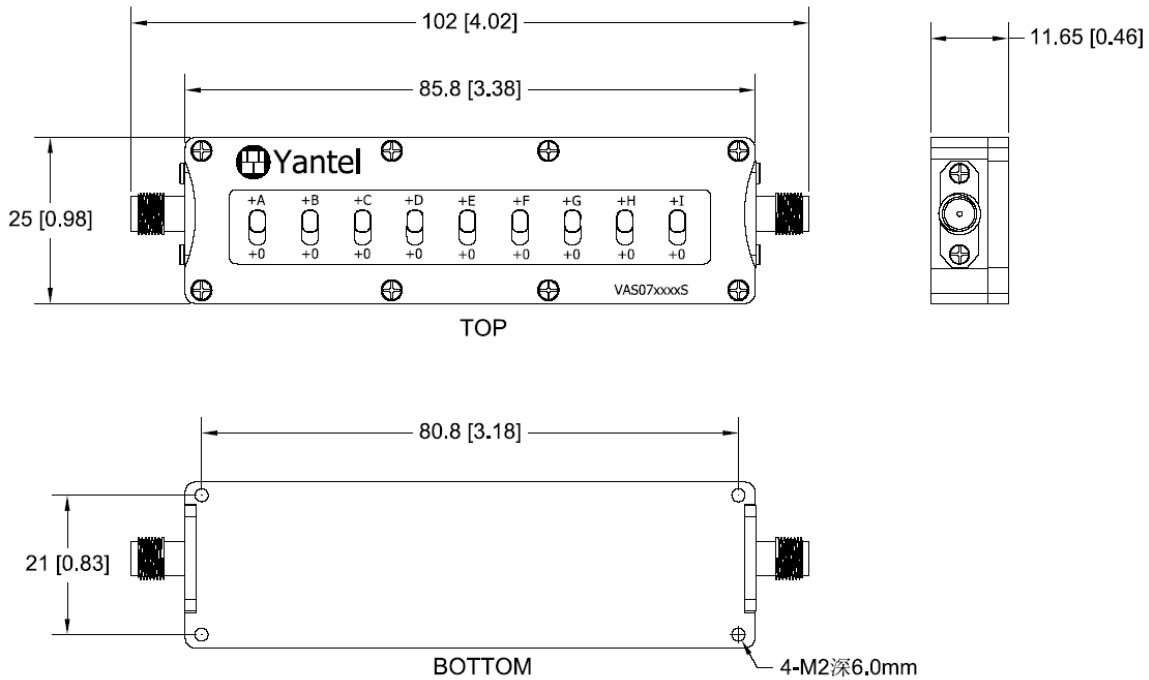


**Package type: S21**

**Yantel Corporation**

Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

**N-type Connector**

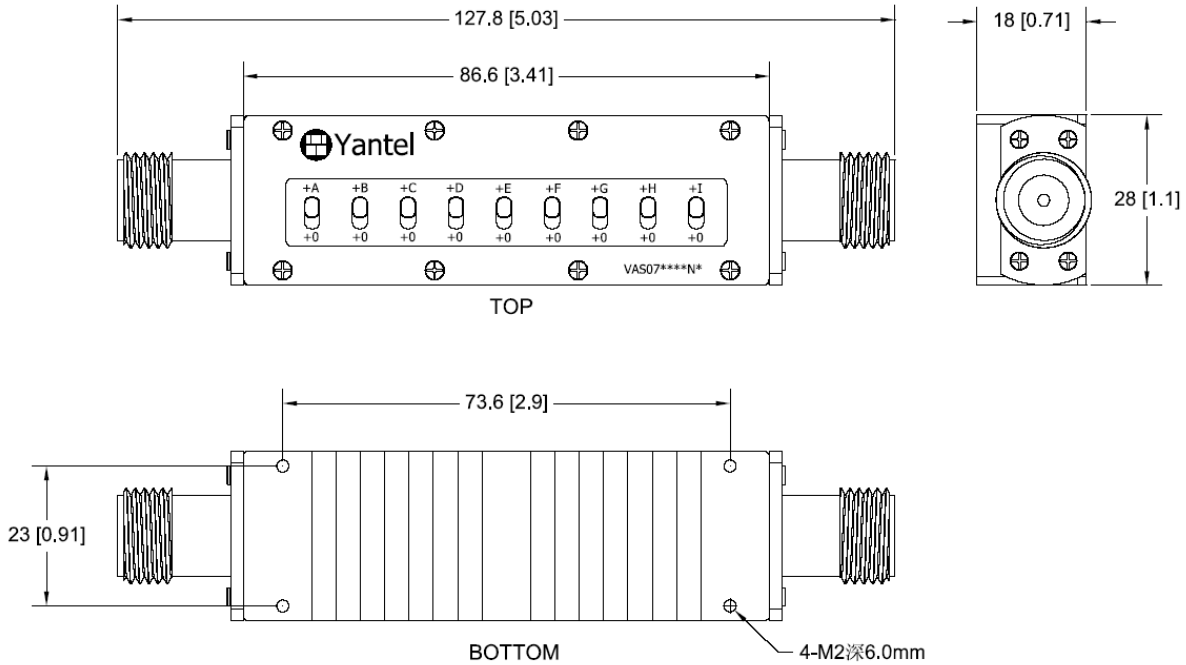


**Package type: N21**

**NOTE:**

1. ALL dimensions shown in mm(tolerance: +/-0.2mm) unless stated otherwise
2. RoHS Compliant in accordance with EU Directive(2011/65/EU)

**Attention**

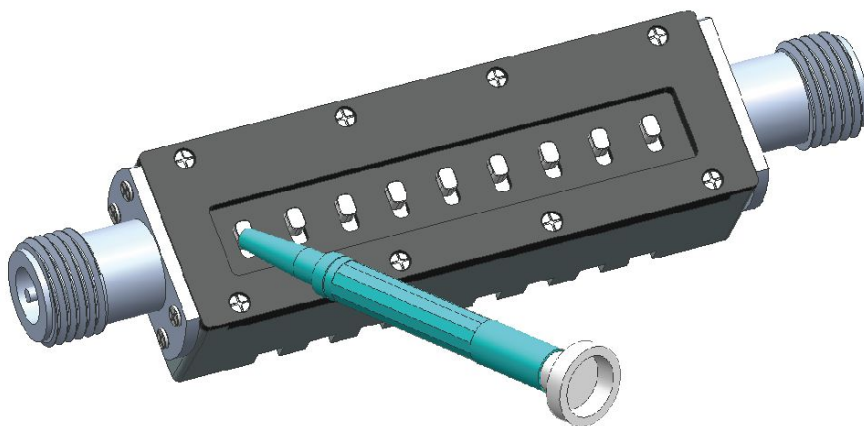


It is much easier to adjust the switch by tools like plastic screw driver.


**Mounting Instructions:** Unit: mm(inch)

This product is panel-mountable via screws.


- Four mounting holes on the product plate. Refer to Fig2, Fig6.
- H represents the thickness of panel. Refer to Fig3, Fig4.
- Recommended length of the screw is 3mm+H. Refer to Fig5.

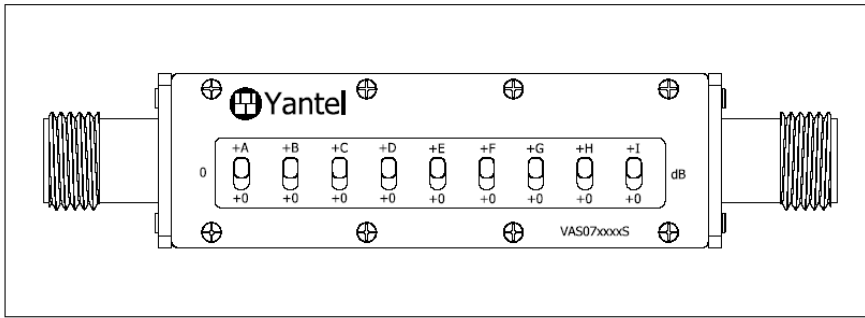


**Front View Fig 2**

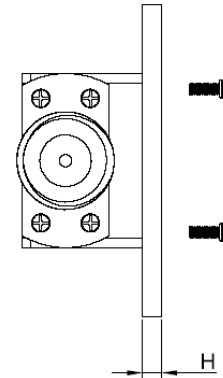


**Lateral View Fig 3**

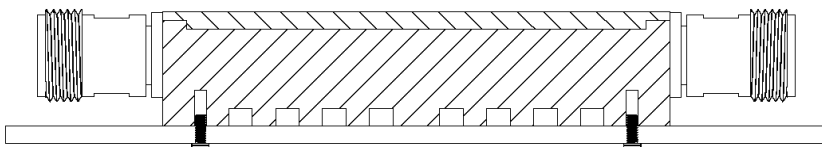


**Sectional View Fig 4**

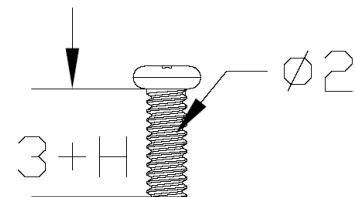

**Recommended length of the screw Fig 5**

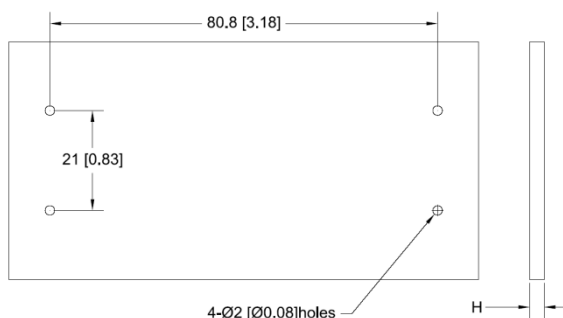

**SMA**

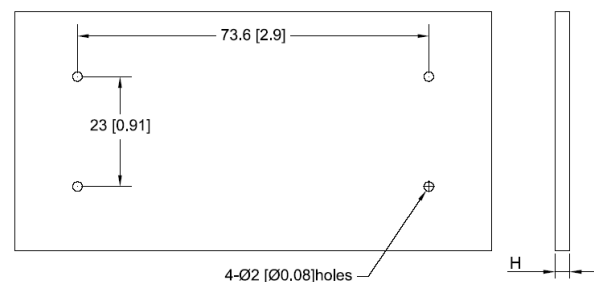

**N-type**

**Mounting holes on user's panel Fig 6**

**Note:**

Attempt to disassemble the product can damage it and void your warranty. In case of any malfunction, please contact your local representative, distributor or the factory immediately.