

SYTFB160KA1S 16.0GHz Surface Mount Bandpass Filter

Description

Yantel's surface mount catalog bandpass filters utilize Yantel's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.


Features

- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

Parameter	Frequency Range (GHz)	Min	Тур.	Мах
Insertion Loss (dB)	15.75 - 16.25		2.75	3.0
Return Loss (dB)		12.0	15.0	
Low Side Rejection (dB)	DC - 14.25	40.0	45.0	
High Side Rejection (dB)	17.75 - 20.5	40.0	45.0	
CW Input Power** (W)				5
$\theta_{JC} \left(\frac{^{\circ}C}{W} \right)$	15			
Size (L x W x H)	0.400 x 0.200 x 0.098 in 10.16 x 5.08 x 2.5 mm			

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

**Power rating assumes the component will be mounted to a PCB with good thermally conducting ground vias as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 125°C base temperature.

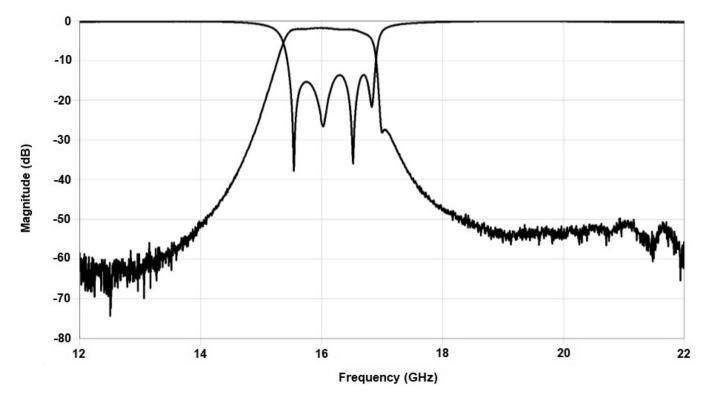

Specifications*


Typical Measured Performance

*Typical de-embedded measured performance mounted on a connectorized test fixture. DEB is 0.254mm RO4350B with 50.00hm CPW ground traces going into the ports at room temperature.



SYTFB160KA1S

16.0GHz Surface Mount Bandpass Filter

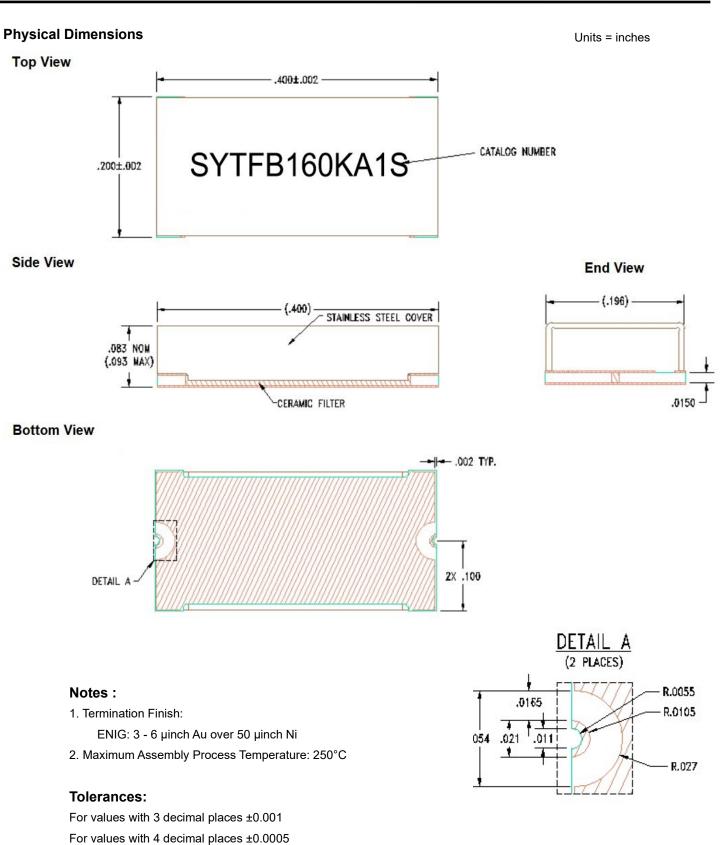

 Yantel Corporation

 Add:
 No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China Tel: 86-755-8355-1886


 Fax:
 86-755-8355-2533

 For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com



SYTFB160KA1S 16.0GHz Surface Mount Bandpass Filter

Recommended PCB Layout

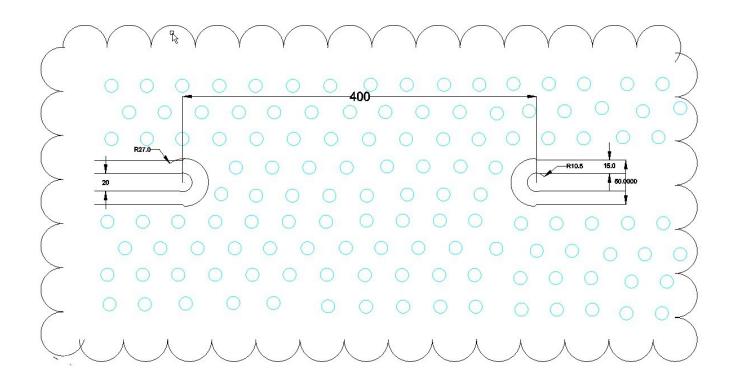

Unit = mils

Note:

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.