

### Fixed Attenuator Chip

- ◆ DC to 8 GHz
- ◆ 16 dB
- ◆ 0.75 W

### Features

- Thin film
- High attenuation accuracy
- Small VSWR
- Ceramic chip: 99% alumina
- Laser trimmed
- Low cost-high performance

### Model No. Description

FACXX XX X

- X - Soldering method A,B or C
- XX- attenuation: \*\*dB.
- XX- frequency range
  - 06: DC to 6GHz
  - 08: DC to 8GHz
  - 10: DC to 10GHz
  - 12: DC to 12.4GHz
  - 18: DC to 18GHz
  - 26: DC to 26.5GHz

- A:for wire-bonding
- B:for lead free reflow
- C:for triple reflow

### Specifications



Frequency Range	DC to 8 GHz
Attenuation	16 dB
Attenuation Accuracy (Typical.)	±1.0 dB DC to 4 GHz + 0.5/-4 dB 4 to 8 GHz
Attenuation Stability	0.0001 dB/dB/°C
Nominal Impedance	50 Ohm
Rated Input Power	0.75 W
Operating Temperature	-55 °C to +150 °C

FREQ. RANGE (GHz)	VSWR(:1) Max.
DC to 4	1.25
4 to 8	1.35


### Material Specification

substrate	99% alumina
terminals	Gold over Tiw Gold thickness : 3 μ m
resistor	Tantalum nitride thin film

### Package Outlines

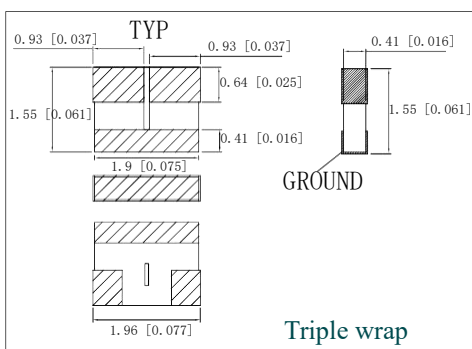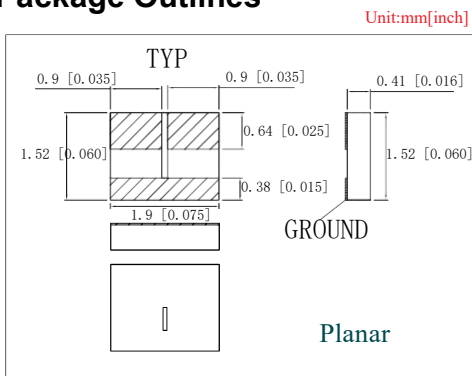

### Recommended Layout

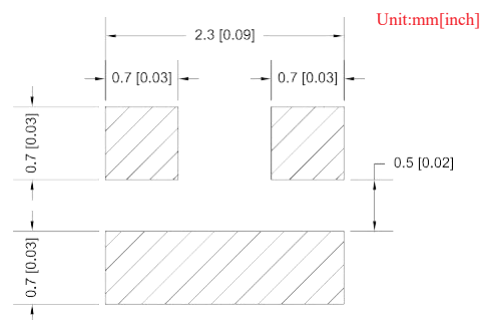

### Average Power Derating Curve

