

## Fixed Attenuator

- ◆ DC to 3 GHz
- ◆ 10 dB
- ◆ 50 Watt
- ◆ N Type

### Features

- High Power
- High attenuation accuracy
- Small VSWR
- Low PIM

### Model No. Description

FATXXXXXX

X- power handling:50W.

X- connector type: SMA, N type or SMB connector.

XX- attenuation: \*\*dB.

XX- 03 represents type number




### Specifications

Frequency Range	DC to 3 GHz
Attenuation	10 dB
Attenuation Accuracy	±0.5 dB over DC - 3 GHz
Nominal Impedance	50 Ohm
Average Power	50 Watt
Operating Temperature	-55 °C to +125°C
Storage Temperature	-55 °C to +125°C

FREQ. RANGE (GHz)	Typical VSWR(:1)	Maximum VSWR(:1)
DC to 1	1.10	
1 to 2	1.20	
2 to 3	1.25	
DC to 3		1.30

### Package Outlines

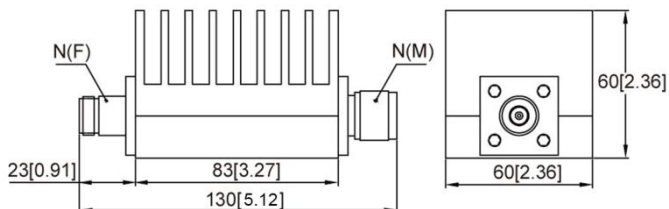

#### Notes:

1. all dimensions shown in mm & inch
2. Dimensions Tolerance ±2%
3. Dimensions and specifications refer to connector type N unless otherwise specified.
4. Custom designs available for other special attenuation value & accuracy

### Material & Plating

Parts	Material	Plating(Micro-inch)
Body & Nut	Aluminum	Black Anodize
Contact (female & male)	QSn6.5-0.1	Gold 30
Insulator	Teflon	

**AVERAGE POWER:** 50W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C.

**PEAK POWER:** 10KW (5µs pulse width with 0.5% duty cycle)

**CONNECTOR TYPE:** N

#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)