


Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process

Specifications


NO.	Specification					
		LPF1	LPF2	LPF3	LPF4	
1	Frequency range (MHz)	30~46	46~72	72~115	115~180	
2	Insertion Loss (dB) @25°C	1.5	1.5	1.5	1.8	
3	Ripple (dB)	1.0	1.0	1.0	1.0	
4	VSWR (In BW)	2.0	2.0	2.0	2.0	
5	Impedance (Ω)	50	50	50	50	
6	Attenuation (dB)	2-d Harm Rej	50	50	50	50
		3-d Harm Rej	50	50	50	50
		2100~2190 MHz	60	60	60	60
Operating & Storage Condition (Component)						
Operation Temperature Range: -40°C ~ +85°C						
Storage Temperature Range: -40°C~ +85°C						
Storage Condition before Soldering (Included packaging material)						
Storage Temperature Range: +5 ~ +40 °C						
Humidity: 30 to 70% relative humidity						

Construction



PIN	Connection	PIN	Connection
1	LPF1 input Port	2	LPF1 output Port
3	LPF2 input Port	4	LPF2 output Port
5	LPF3 input Port	6	LPF3 output Port
7	LPF4 input Port	8	LPF4 output Port

Mounting Considerations

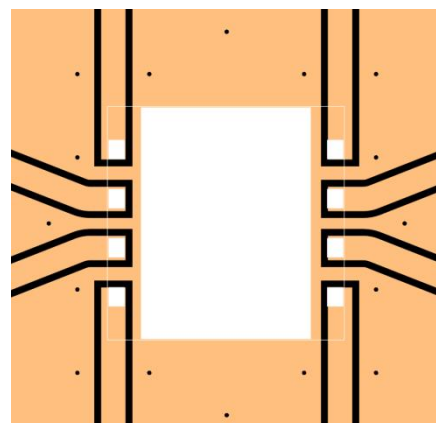

Unit: mm
Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness


Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China


Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Dimensions

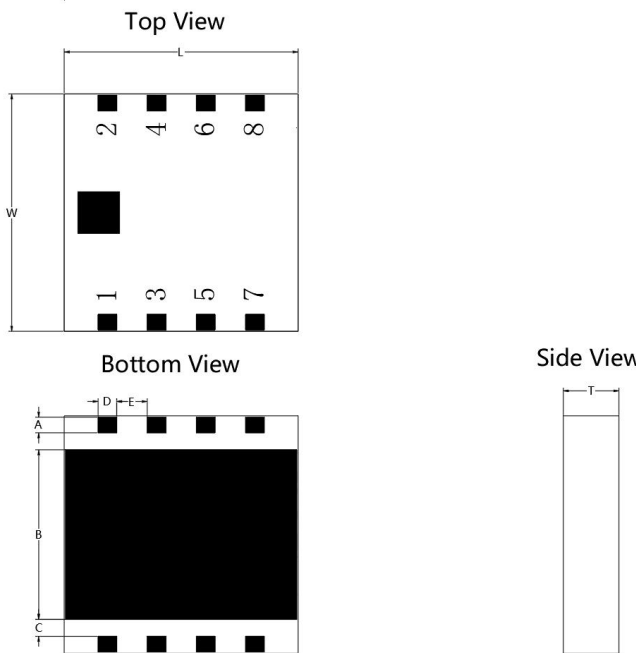Figure	Symbol	Dimension (mm)
	L	13.80 ± 0.30
	W	14.00 ± 0.30
	T	2.80 ± 0.20
	A	0.92 ± 0.10
	B	10.00 ± 0.10
	C	1.00 ± 0.10
	D	1.10 ± 0.10
	E	1.80 ± 0.10

Solder Reflow Standard Conditioning

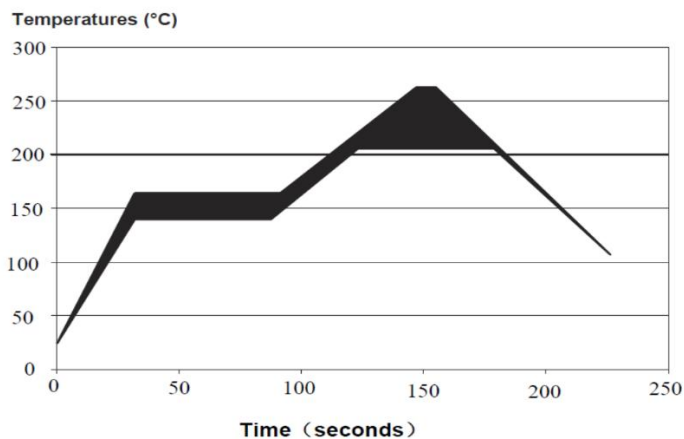

Storage Conditions

Temperature : +5 to +30 °C

Humidity : 20 to 70% RH

Term of storage : Within 12 months (After the delivery) *

Baking : Unnecessary

* After peeling off cover tape, do not keep exposing the products to the open air. For the products stored longer than 12 months, confirm their terminals and solderability before use.

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com