


Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process


Specifications

| NO. | Parameter | Frequency (MHz) | SPEC | |
|-----|----------------------------------|-----------------|------|------|
| | | | Min. | Max. |
| 1 | Insertion Loss (dB) | 1328~1620 | | 2.5 |
| 2 | Attenuation (dBC) | 1195~1245 | 20 | |
| 3 | VSWR | 1328~1620 | | 1.7 |
| 5 | In/Output Impedance (Ω) | | 50 | |

Construction

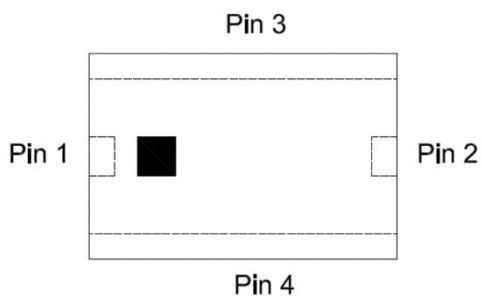

Mounting Considerations

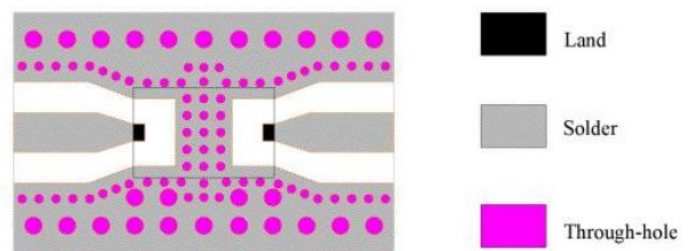


| PIN | Connection |
|-----|-------------|
| 1 | Input Port |
| 2 | Output Port |
| 3 | GND |
| 4 | GND |


Unit: mm

Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness

Dimensions
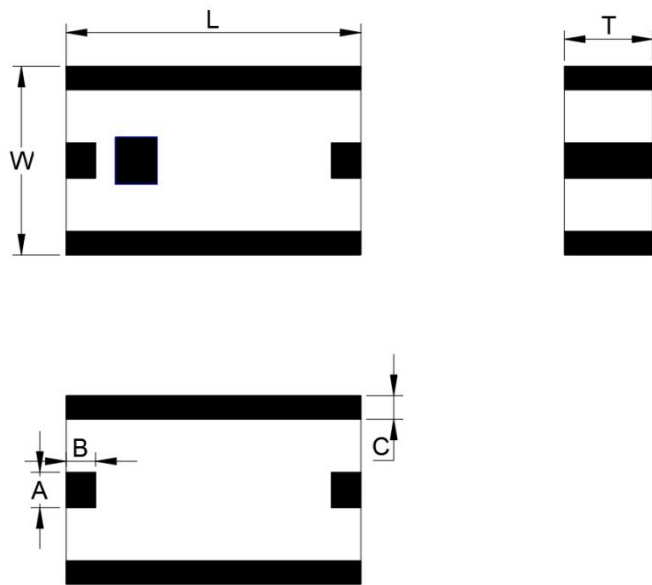
| Figure | Symbol | Dimension (mm) |
|--|--------|----------------|
|  | L | 5.0±0.10 |
| | W | 3.2±0.10 |
| | T | 1.2±0.10 |
| | A | 0.60±0.10 |
| | B | 0.40±0.10 |
| | C | 0.4±0.10 |

Typical Electrical Characteristics (T=25°C)

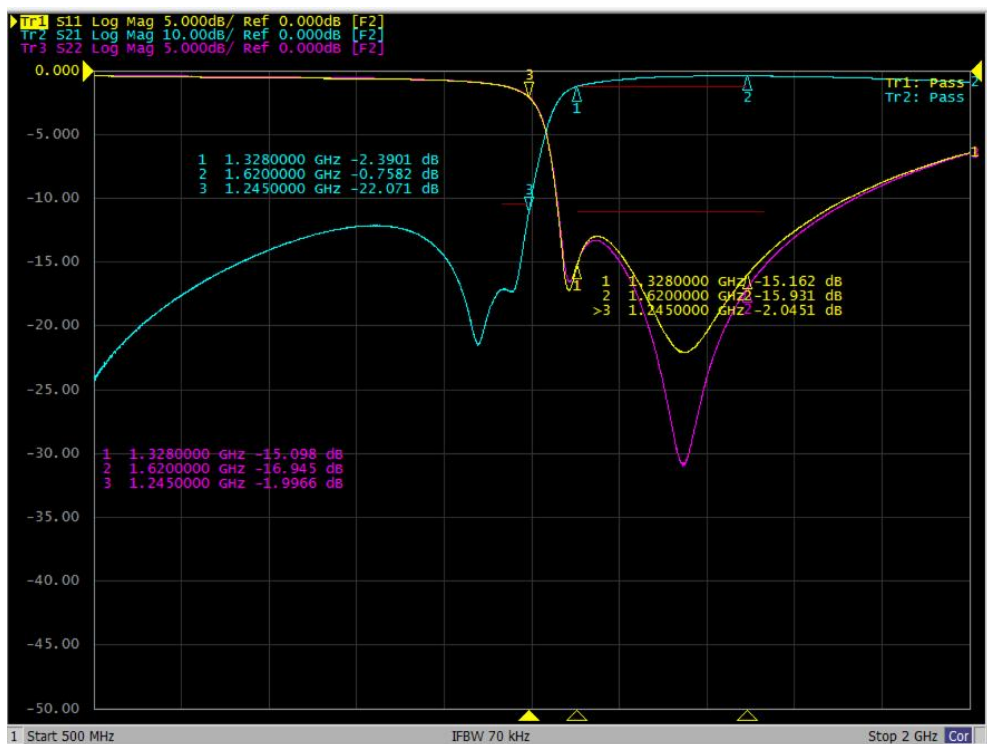


Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Solder Reflow Standard Conditioning

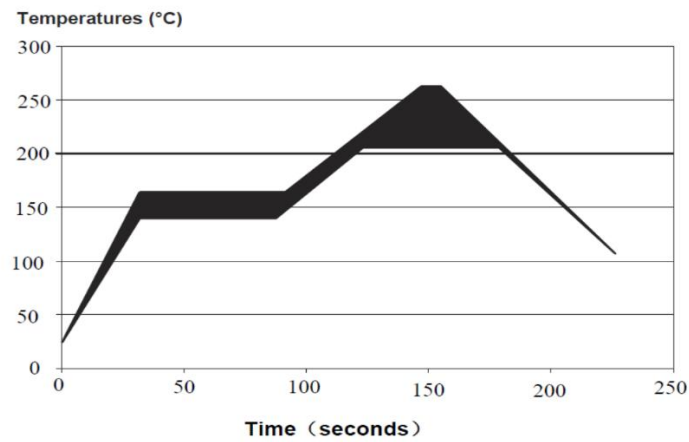

Storage Conditions

Temperature : +5 to +30 °C

Humidity : 20 to 70% RH

Term of storage : Within 12 months (After the delivery) *

Baking : Unnecessary

* After peeling off cover tape, do not keep exposing the products to the open air. For the products stored longer than 12 months, confirm their terminals and solderability before use.