


Temperature Compensation Attenuator DC~3GHz 75Ω 2W 1~6dB P3~P9

Part No. Descriptions

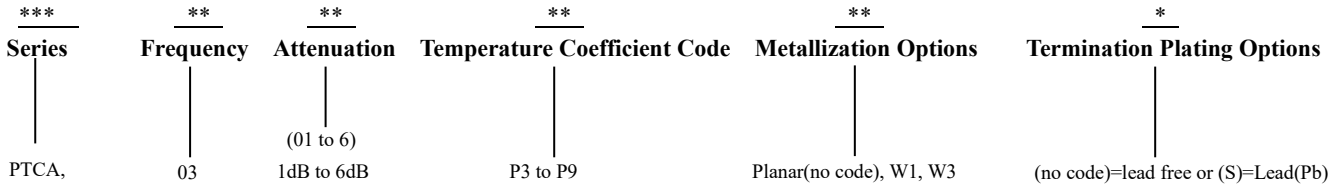

Part No.	Frequency Range (GHz)	Attenuation (dB)	Temperature Coefficient Code	Temperature Coefficient of Attenuation (dB/dB/°C)	Max. VSWR (:1) @1GHz@25°C	Max. Input Power (W)	Attenuation Accuracy (dB)
PTCA0301P*	DC-3	1	P3~P9	+0.003~ +0.009	1.25	2	±0.5
PTCA0302P*	DC-3	2	P3~P9	+0.003~ +0.009	1.25	2	±0.5
PTCA0303P*	DC-3	3	P3~P9	+0.003~ +0.009	1.25	2	±0.5
PTCA0304P*	DC-3	4	P3~P9	+0.003~ +0.009	1.25	2	±0.5
PTCA0305P*	DC-3	5	P3~P9	+0.003~ +0.009	1.25	2	±0.5
PTCA0306P*	DC-3	6	P3~P9	+0.003~ +0.009	1.25	2	±0.5

General Specifications

- Frequency Range DC to 3GHz
- Attenuation 2dB
- Attenuation Accuracy at 25°C ±0.5dB@1GHz
- VSWR 1.25:1 Max. @1GHz
- Nominal Impedance 75 Ohms
- Power Rating 2 Watts CW
- Power Derating 100% @ 125°C
Derates to 0% @ 150°C
- Operating Temperature -55°C to +150°C
- Temperature Coefficient over Operating Temperature Range: See Table Above.
Temperature Coefficient Tolerance: ±0.001dB/dB/°C.
- Substrate: Alumina (Al2O3)
- Resistive material: Thick film
- Terminal material: Thick film, Nickel barrier with pure tin plate (lead free) or with tin (Sn90) plate (10% lead contained)
- Protective Coating: Thick film (ethyl acetate)
- Package Outline: See Sheet 3.
- Workmanship: per MIL-PRF-55342.
- RoHS Compliant.
- Electrostatic Discharge Control: per MIL-STD-1686.

Unit Marking dB Value (XX), Direction of Shift (P) and TCA Shift (X).
 Legibility and Permanency: per MIL-STD-130.

Quality Assurance


- Sample inspect per ANSI/ASQC Z1.4 general inspection, LEVEL II, AQL = 1.0.
 - 1.1 Visual and mechanical examination for conformance to outline package requirements.
- Select five (5) Units from lot measure attenuation from DC to 3GHz every 20°C over the temperature range -35°C to +105°C.
 - 2.1 Calculate, using linear regression, the slope of the curve.
 - 2.2 Calculate TCA using the following formula: TCA = Slope / Attenuation @ 25°C.
- Test data required for customer.

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

PTCA Response

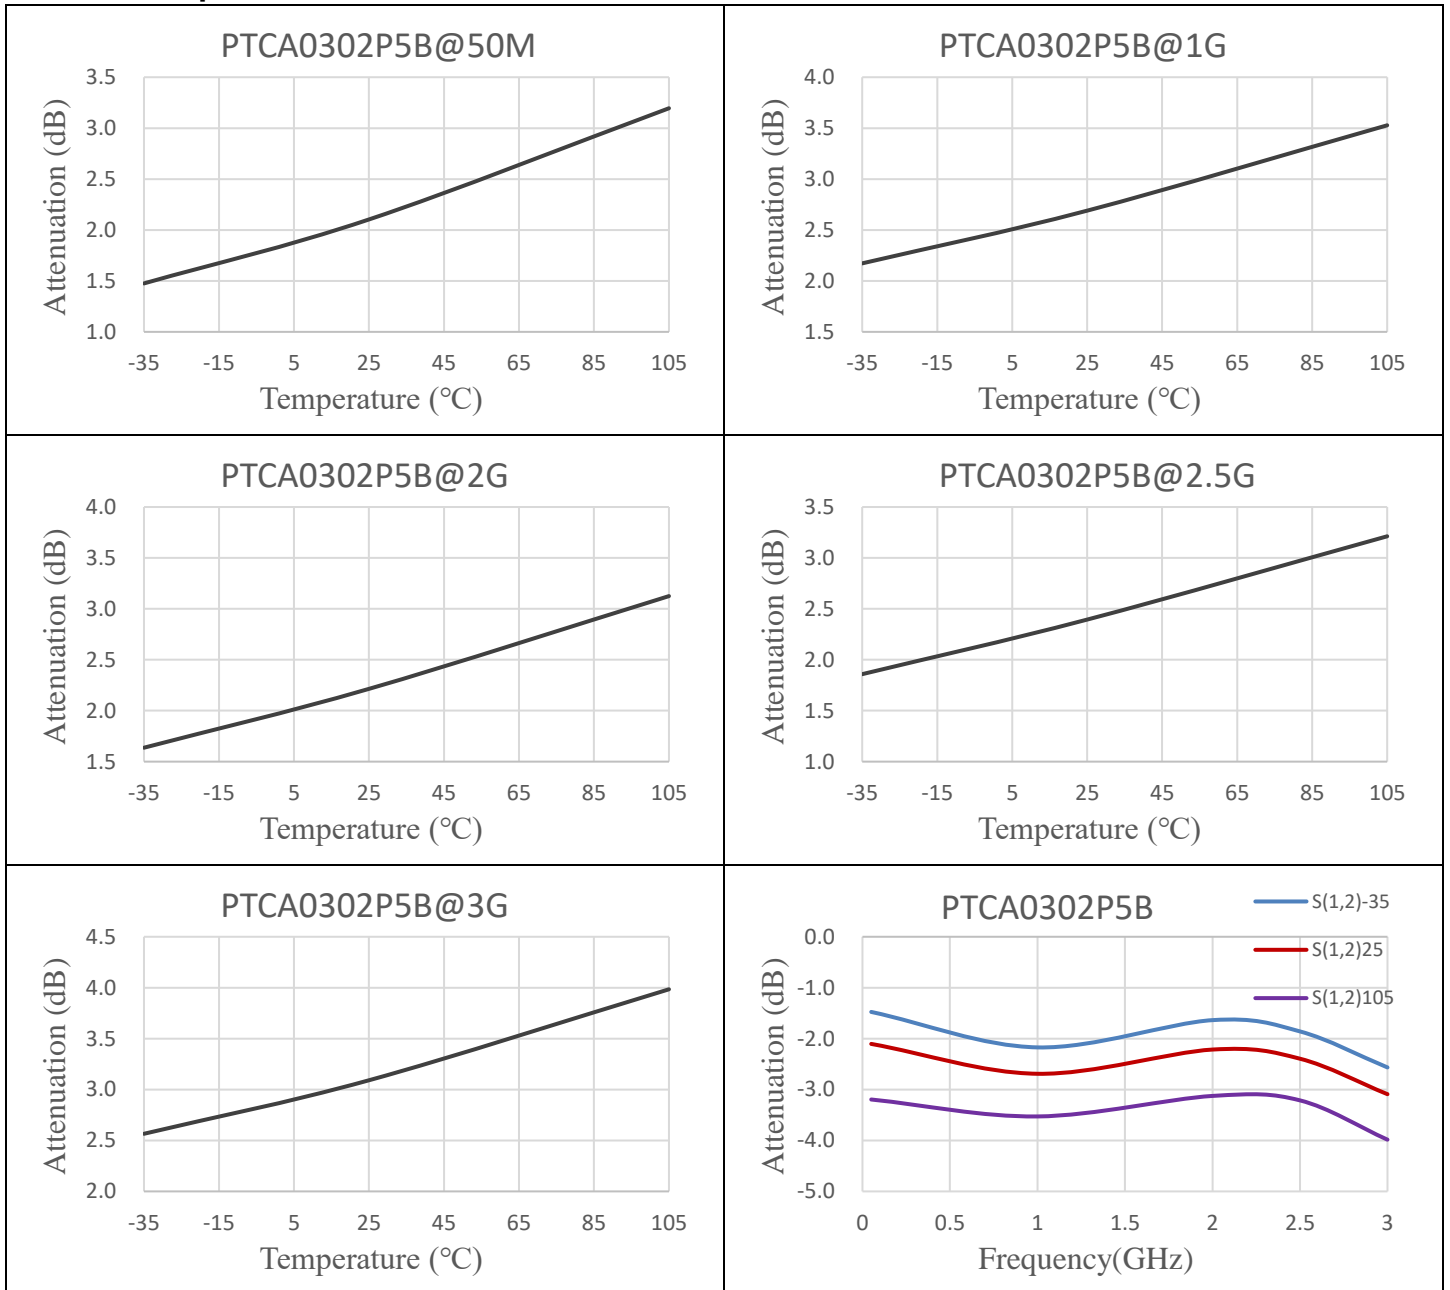

Part No.	F (Hz) T (°C)	Attenuation					Return Loss				
		50M	1G	2G	2.5G	3G	50M	1G	2G	2.5G	3G
PTCA0302P5B	25	2.10	2.69	2.21	2.39	3.09	21.65	9.67	22.45	14.38	11.12
	-35	1.48	2.17	1.64	1.86	2.57	25.04	9.14	22.93	12.89	10.79
	105	3.20	3.53	3.13	3.21	3.98	17.17	10.50	21.73	18.52	11.36
	P Value:	5.84	3.60	4.80	4.04	3.28					

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533


For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Package Outlines

All dimensions shown in mm unless stated otherwise


Note: Dimension tolerance in ± 0.10 otherwise mention.

* represents number

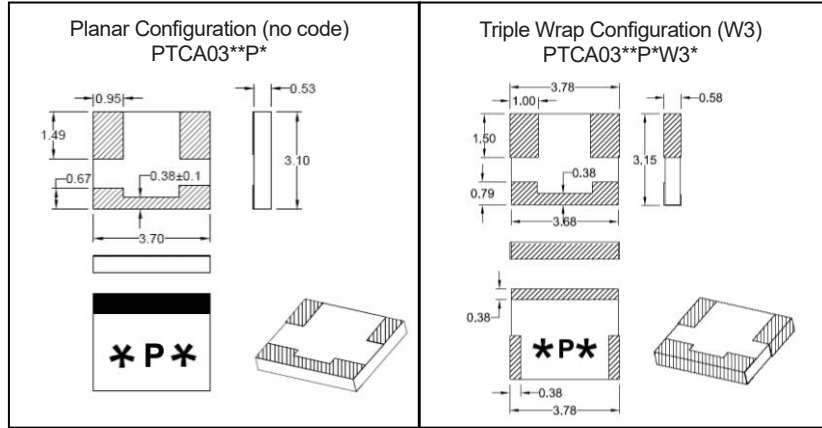


Recommended Layout

All dimensions shown in mm unless stated otherwise




Power Rating & Derating Curve

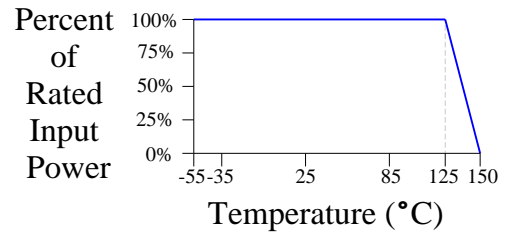

Tape & Reel Drawing



All dimensions shown in mm unless stated otherwise

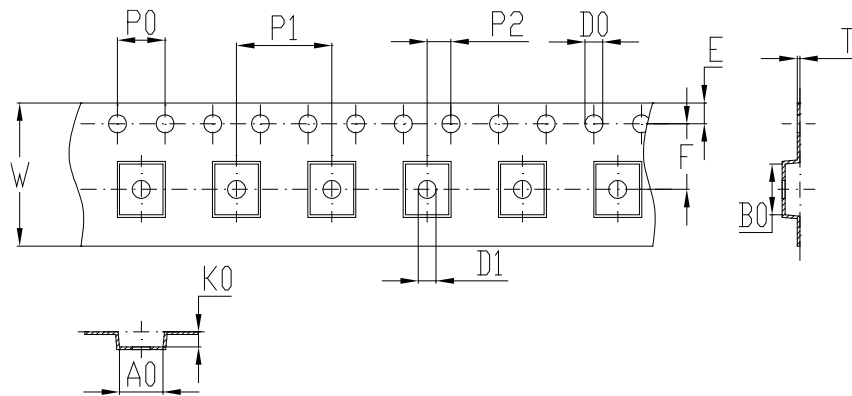

Notice:

- A. 10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.
- F. Material: PE 100
- G. Thickness: 0.23 ± 0.05 mm
- H. 1500 units (maximum) / T&R

symbol	A0	B0	K0	P0	P1	P2
spec	3.65 ± 0.1	4.25 ± 0.1	1.25 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	2.0 ± 0.1
symbol	W	T	E	F	D0	D1
spec	12.0 ± 0.3	0.23 ± 0.05	1.75 ± 0.1	5.5 ± 0.1	$\Phi 1.5^{+0.1}_{-0.0}$	$\Phi 1.5$ min

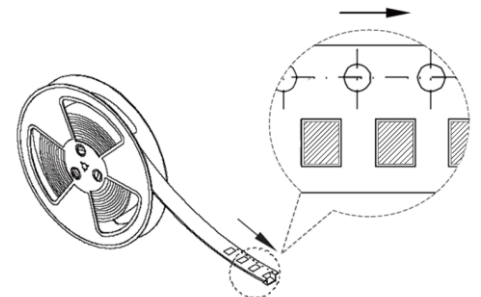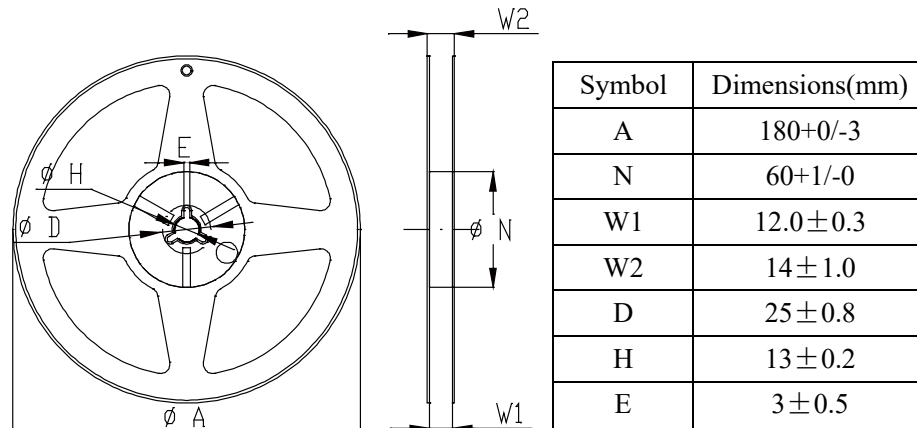

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com