


## General Description

CVD Diamond Chip Terminations offer a unique combination of extreme high power ratings in very small packages. These terminations may be used in applications up to 30 GHz and are ideal for applications with requirements for high power capability, broad frequency response, small footprint and light weight. The terminations are manufactured using all thin film construction and have a gold finish that it both wire bondable and solderable. This total thin film construction also makes them ideal for peak power applications. High reliability tested versions based on MIL-PRF-55342 are also available. Select from tape and reel, bulk, or waffle packaging. These products are also lead free, RoHS compliant and S-level approved.

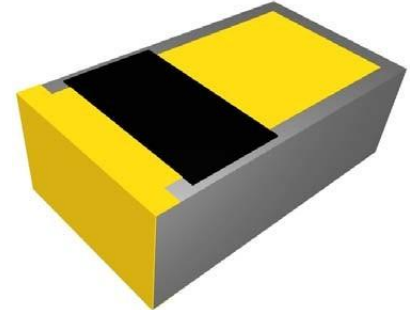

## Features

- Small Size - Light Weight
- Highest Thermal Performance Possible
- Excellent Peak Power Capability
- Rugged Passivated TaN Film
- Moisture Resistant
- Pure Gold Input Pads
- Wire Bondable or Solderable
- High Power

## Applications

- Broadcast
- Higher Power Filters
- High Power Amplifiers
- Instrumentation
- Isolators
- Military
- Satellite Communications
- Phased Array Radar

## Specifications

Nominal Impedance:	50 $\Omega$ $\pm$ 5%
Frequency Range:	DC – 26.5 GHz
Input Power CW:	10 Watts
Peak Power:	100 Watts (1 $\mu$ s pulse width/1% duty cycle)
VSWR:	DC - 8.0 GHz      1.35:1
	8.0 – 12.4 GHz    1.50:1
	12.4 – 18.0 GHz   1.70:1
	18.0 – 26.5 GHz   1.95:1
Operating Temperature:	-55 °C To 150 °C
Storage Temperature:	-55 °C To 150 °C
Temperature Coefficient:	$\pm$ 200 PPM/°C Max


### Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533


For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

## Mechanical

Substrate Material:	CVD Diamond
Terminal Material:	Gold over Nickel
Ground Plane Material:	Gold over Platinum
Resistive Element:	Thin Film

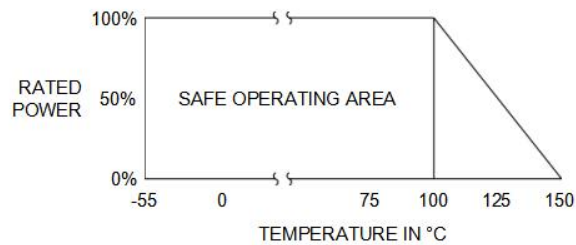

## Mechanical Outline

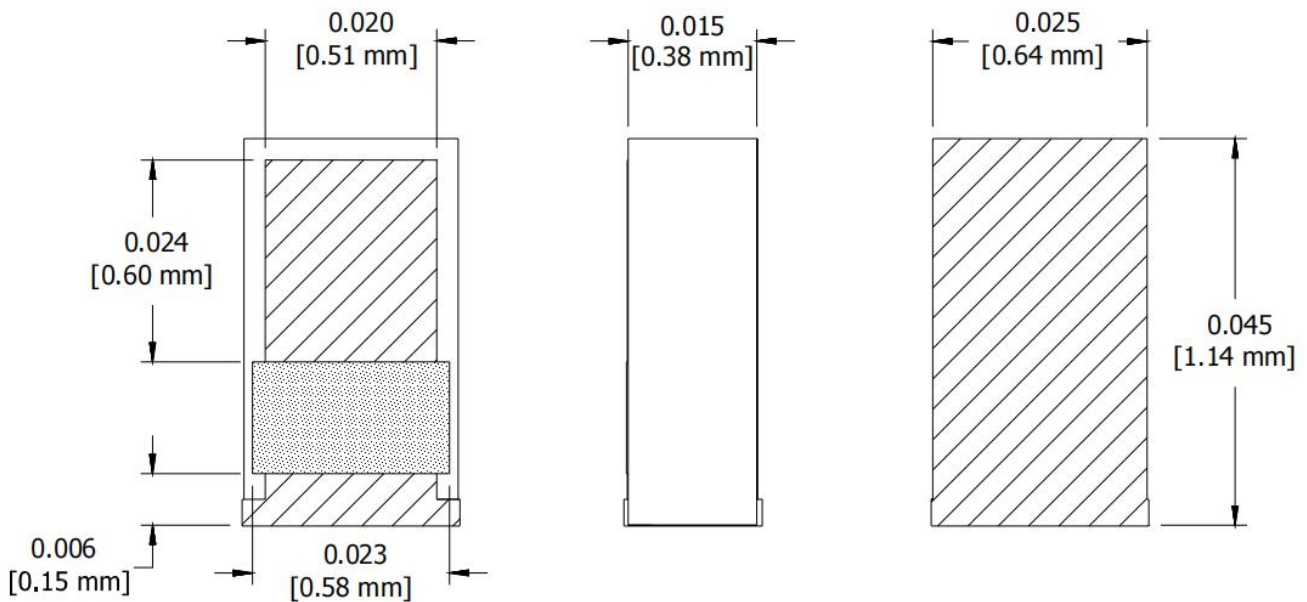

Units =inches[ mm]

### Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)