

Description

Yantel's surface mount catalog bandpass filters utilize Yantel's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.

Features

- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω


Specifications*

| Parameter | Frequency Range (GHz) | Min | Typ. | Max |
|--|---|-----|------|-----|
| Insertion Loss (dB) | 10.85 - 12.0 | | 1.0 | 2 |
| Return Loss (dB) | | 10 | 15 | |
| Low Side Rejection (dB) | DC - 9.6 | 40 | 45 | |
| High Side Rejection (dB) | 14.3 - 20 | 40 | 50 | |
| CW Input Power** (W) | | | | 10 |
| $\theta_{jc} \left(\frac{^{\circ}C}{W} \right)$ | 7.5 | | | |
| Size (L x W x H) | 0.250 x 0.160 x 0.098 in 6.35 x 4.0 x 2.5 mm | | | |

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary ± 0.5 dB over temperature.

**Power rating assumes the component will be mounted to a PCB with good thermally conducting ground vias as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 125°C base temperature.

Typical Measured Performance

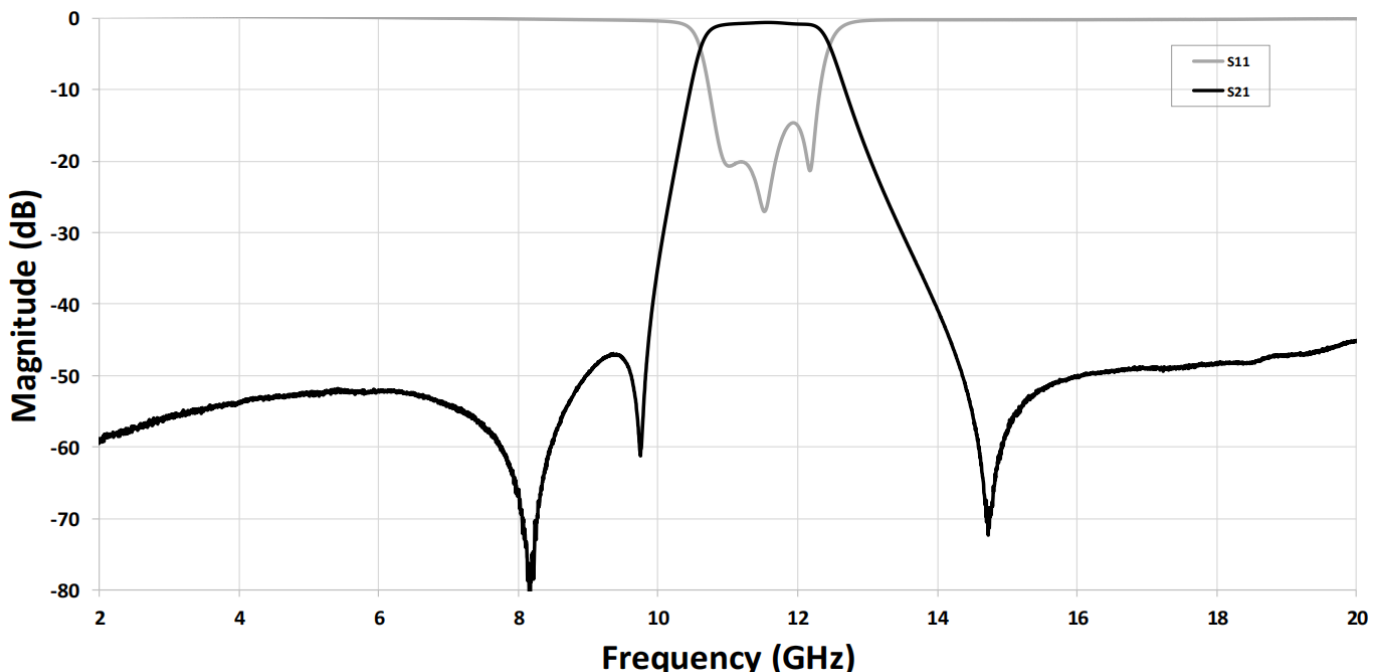

*Typical de-embedded measured performance mounted on a connectorized test fixture. DEB is 0.254mm RO4350B with 50.0Ohm CPW ground traces going into the ports at room temperature.

Yantel Corporation


Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Physical Dimensions

Units = inches

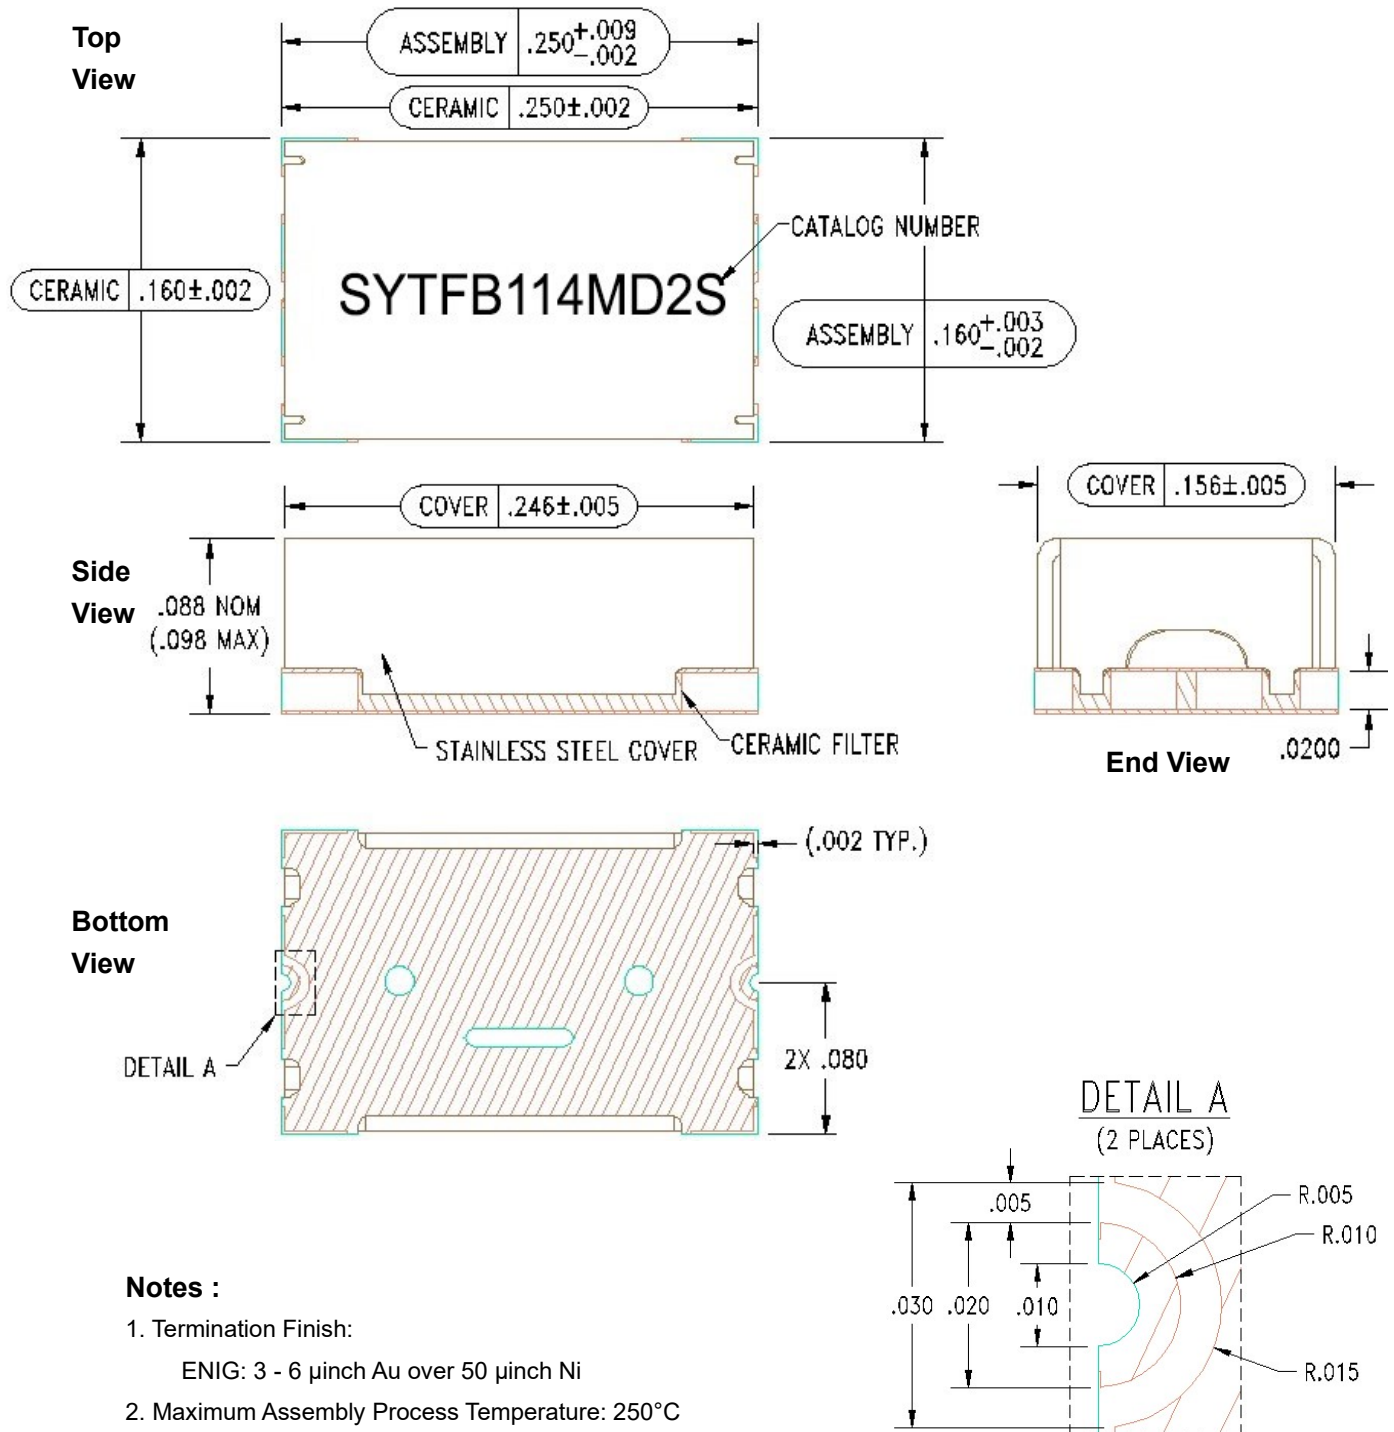


Notes :

- Termination Finish:
ENIG: 3 - 6 μinch Au over 50 μinch Ni
- Maximum Assembly Process Temperature: 250°C

Tolerances:

For values with 3 decimal places ± 0.001
 For values with 4 decimal places ± 0.0005

Recommended PCB Layout

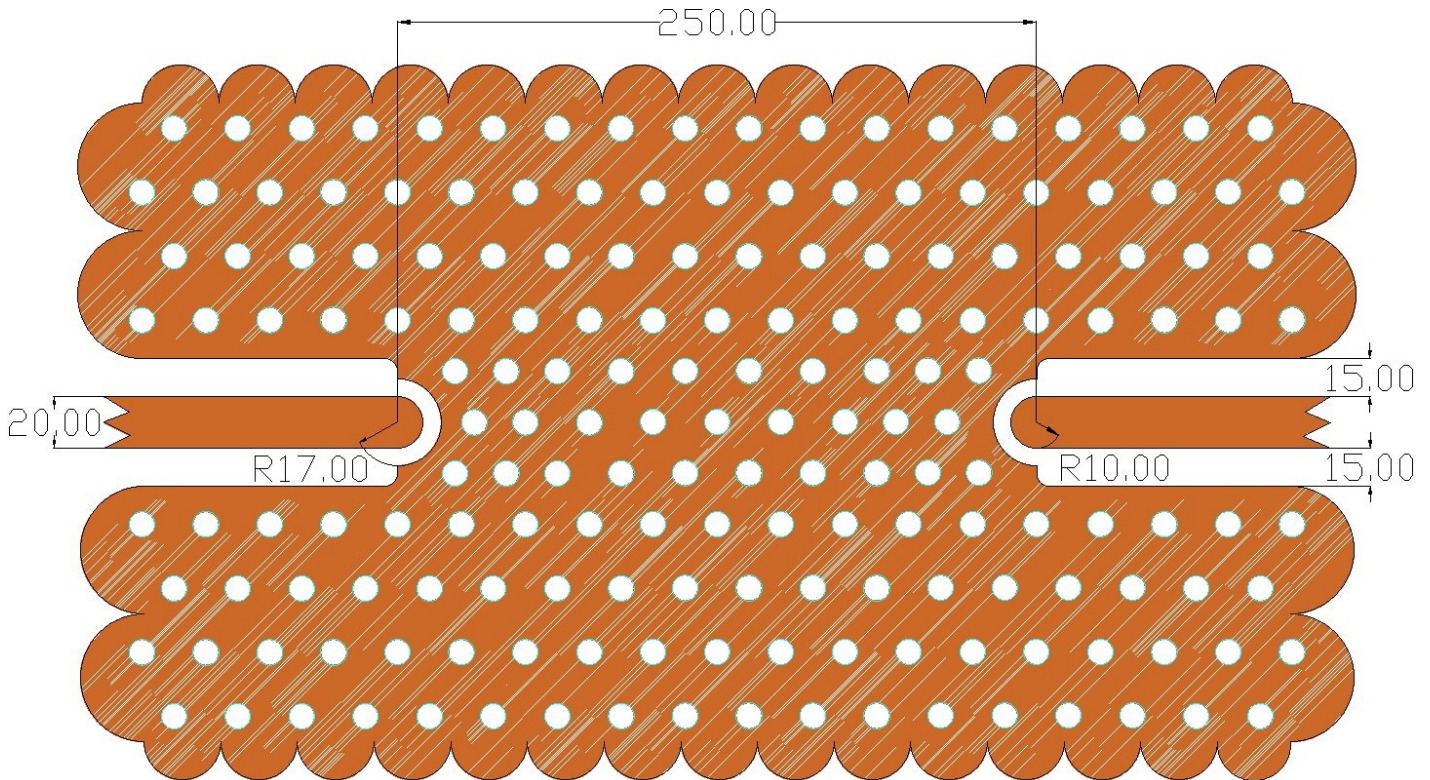

Unit =mils

Note:

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.