

SYTFBP0204

Surface mounted bandpass filter

Description

Yantel's surface mounted bandpass filters have the advantages of low insertion loss and return loss, small size, high rejection, good product consistency, etc. The product adopts high-precision innovative manufacturing process, suitable for mass production, competitive cost, and has obvious cost advantages compared with thin film filters.

Features

- Small size
- Low loss, High rejection
- With shielding cover
- SMD Surface mounted
- Humidity level:MSL1
- Working temperature:-55 to +85°C
- Characteristic Impedance:50Ω
- Tape package
- Competitive price and suitable for large volume use

Technical Data (Normal temperature +25°C)


No.	Parameter	Min.	Typical	Max.	Unit	
1-1	Model No.		SYTFBP0204			
1-2	Size		11.43mm*11.5mm*0.76mm			
1-3	Central Frequency f ₀		3		GHz	
1-4	Working Frequency	2.2		3.8	GHz	
1-5	Central Loss		2.0	3.0	dB	
1-6	Band fluctuation		0.8	1.0	dB	
1-7	Return Loss	12	15		dB	
1-8	Rejection@4.4GHz		30		dBc	
1-9	Power				dBm	
1-10	Working temperature	-55		+85	°C	
1-11	Storage temperature	-55		+125	°C	
1-12	Output installation method		Surface mounted			



SYTFBP0204

Surface mounted bandpass filter

Dimensions

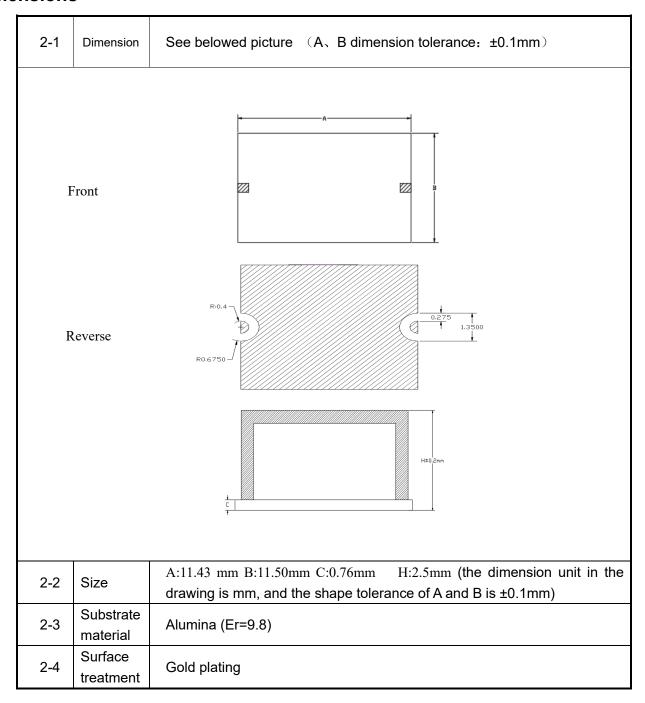


Version status

Version No.	Version date	File status
V2	20251113	✓

SYTFBP0204

Surface mounted bandpass filter

Recommended assembly drawing

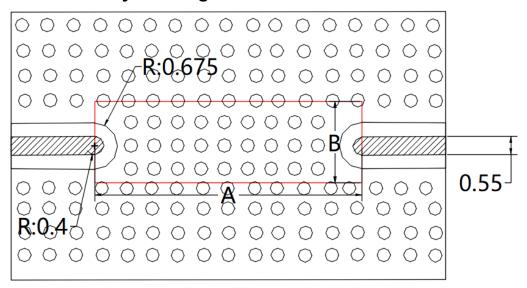

Remark point:

- 1. Testing Substrate material is Rogers4350B(Er=3.66),thickness is 0.254mm
- 2. Make sure there is enough solder on the bottom surface of the filter and ensure good grounding.
- 3. The maximum temperature during assembly is 250°C.

Test Curve:

