
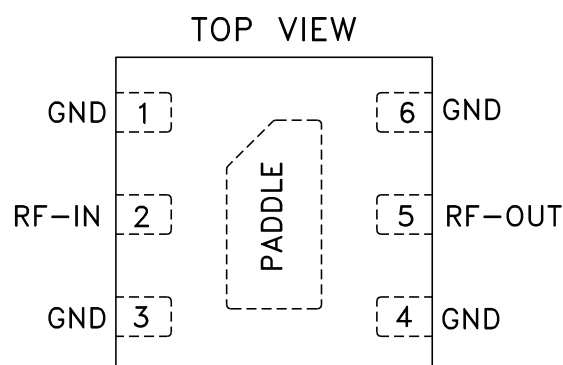



Features

- 4.5 dB Slope
- Negative Insertion Loss Slope vs. Frequency
- Wideband operation, DC to 45 GHz
- Excellent Power Handling Capability
- Small Size and simple to use (2 mm x 2 mm)
- Human Body Model (HBM): Class 2 (Pass 2000V)
- Moisture Sensitivity: MSL1



Applications

- Cellular Infrastructure
- 5G
- Wideband Communications
- Test Instrumentation
- Defense

Electrical specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		45	GHz
Insertion Loss	0.01	5.4	5.6	5.9	dB
	10	5.0	5.3	5.6	
	20	-	4.3	-	
	30	2.3	2.9	3.3	
	40	-	1.5	-	
	45	-	1.1	-	
VSWR)	0.01-10	-	1.16	-	:1
	10-20	-	1.16	-	
	20-30	-	1.24	-	
	30-40	-	1.34	-	
	40-45	-	1.46	-	
*Input RF Power	29				dBm
Operating & Storage Condition					
Operation Temperature Range: -55℃ ~ +105℃					
Storage Temperature Range: -65℃ ~ +150℃					

*Derates linearly to +25 dBm at 105°C


Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China


Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Outline Drawing

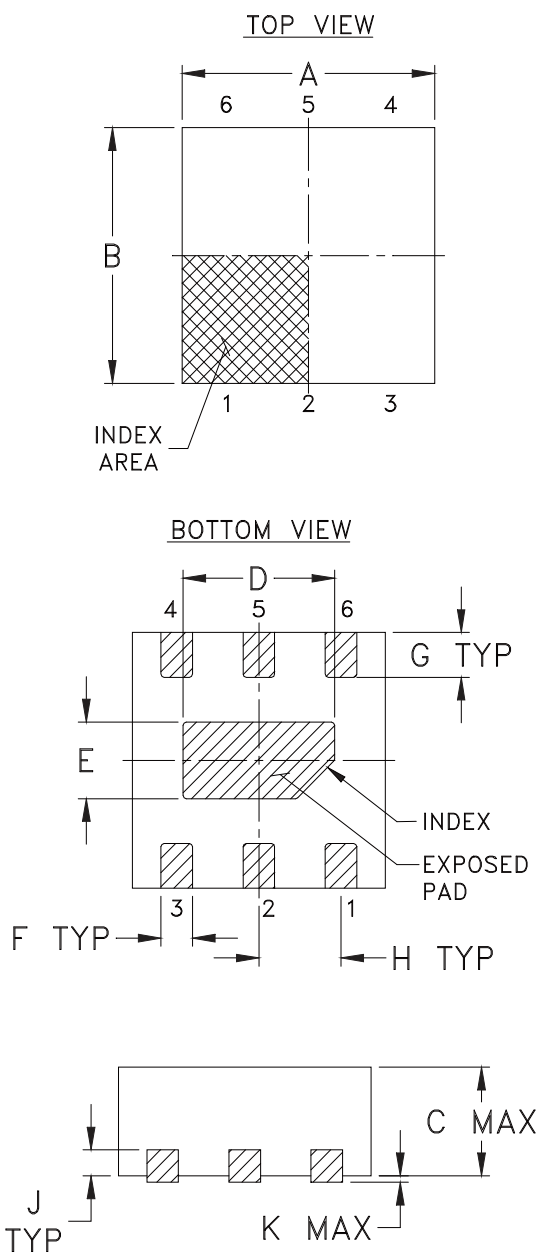

PCB Land Pattern

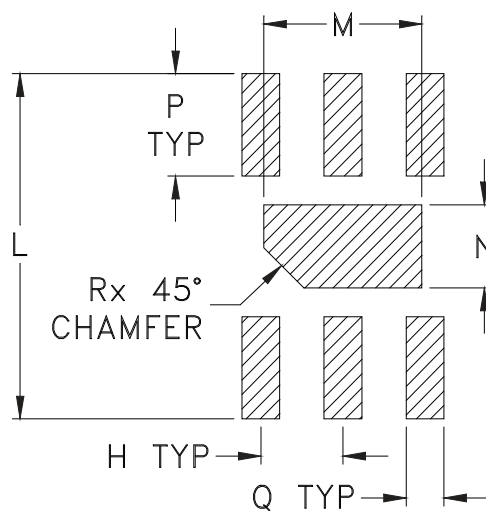

A	B	C	D	E	F	G	H	J	K	L	M
.079 (2.00)	.079 (2.00)	.039 (1.00)	.047 (1.20)	.024 (.60)	.010 (.25)	.014 (.35)	.026 (.65)	.008 (.20)	.002 (.05)	.106 (2.70)	.049 (1.25)
N	P	Q	R	WT, GRAM							
.026 (.65)	.031 (.80)	.012 (.30)	.012 (.30)	.006							

Units= inches (mm)

Tolerances=±.001 (±.25)



Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Simplified Schematic And Pad Description

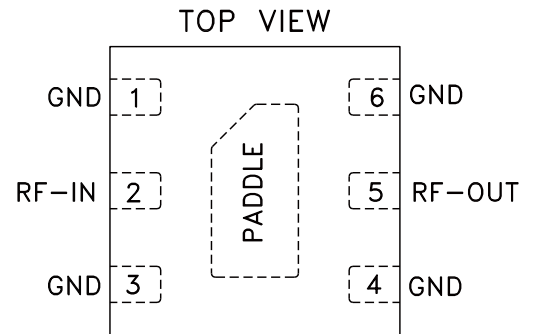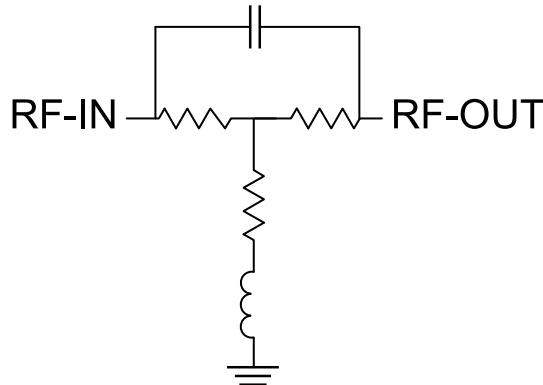

Function	Pad Number	Description
RF-IN	2	RF-Input pad
RF-OUT	5	RF-Output pad
GND	1,3,4,6 & Paddle	Ground

Characterization Test Circuit

