




Features

- 8.3 dB Slope
- Negative Insertion Loss Slope vs. Frequency
- Wideband operation, DC to 20 GHz
- Excellent Power Handling Capability
- Small Size and simple to use (2 mm x 2 mm)
- Human Body Model (HBM): Class 2 (Pass 2000V)



TOP VIEW

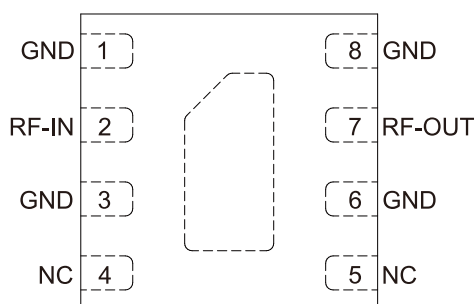

Applications


- Fixed Satellite
- Mobile
- Radio location
- Space research

Electrical specifications at 25°C


Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		20	GHz
Insertion Loss	0.01	8.8	9.1	9.4	dB
	5	-	8.0	-	
	10	-	5.2	-	
	18	1.3	1.5	1.9	
	20	-	0.8	-	
VSWR	0.01-5	-	1.06	-	:1
	5-10	-	1.18	-	
	10-18	-	1.29	-	
	18-20	-	1.10	-	
		-		-	
*Input RF Power	34				dBm
Operating & Storage Condition					
Operation Temperature Range: -55℃ ~ +105℃					
Storage Temperature Range: -65℃ ~ +150℃					

*Derates linearly to +32 dBm at 105°C

Outline Drawing

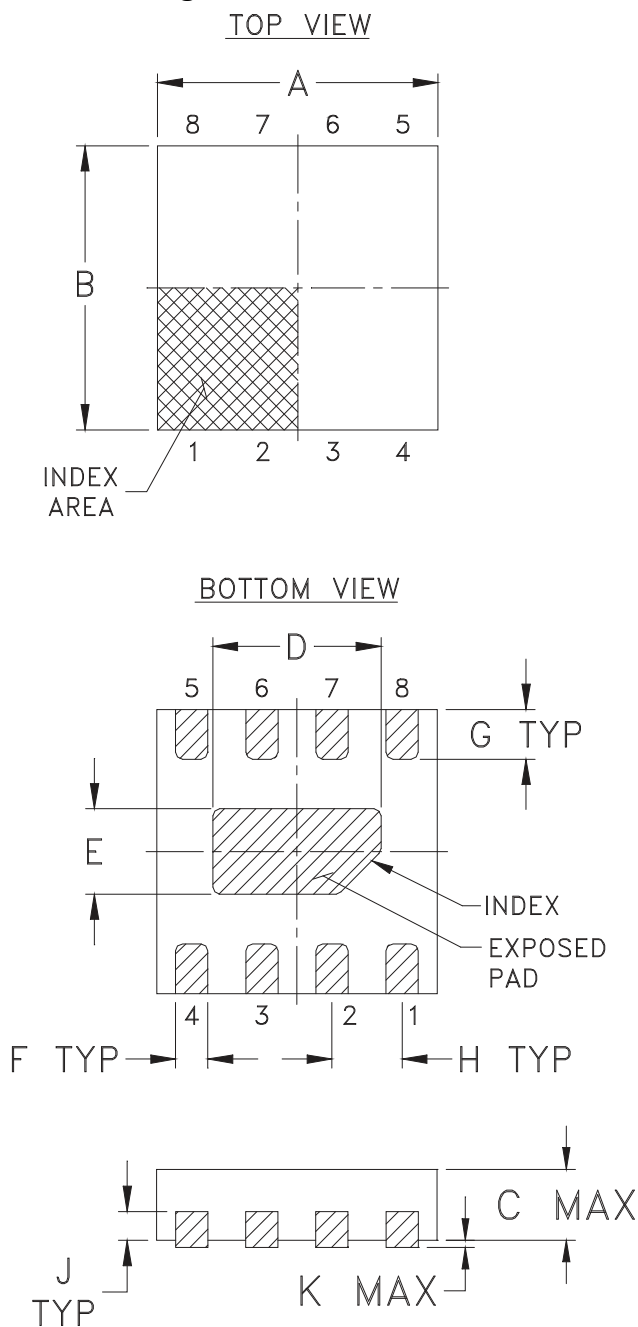

PCB Land Pattern

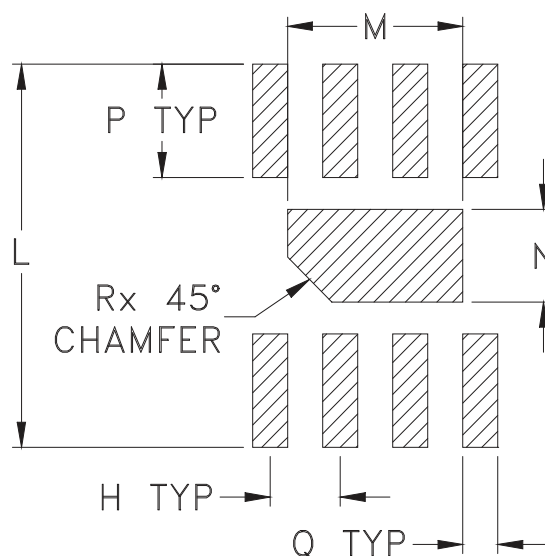

A	B	C	D	E	F	G	H	J	K	L	M
.079 (2.00)	.079 (2.00)	.039 (1.00)	.047 (1.20)	.024 (.60)	.009 (.23)	.014 (.35)	.020 (.50)	.008 (.20)	.002 (.05)	.106 (2.70)	.049 (1.25)
N	P	Q	R	WT, GRAM							
.026 (.65)	.031 (.80)	.010 (.25)	.012 (.30)	.006							

Units= inches (mm)

Tolerances=±.01 (±.25)



Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Simplified Schematic And Pad Description

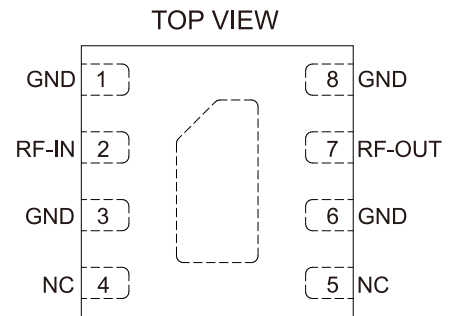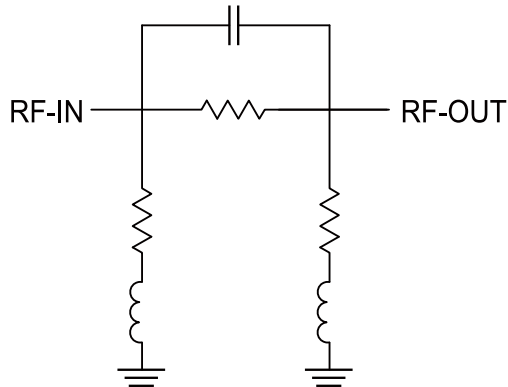

Function	Pad Number	Description
RF-IN	2	RF-Input pad
RF-OUT	7	RF-Output pad
GND	1,3,6,8 & Paddle	Ground
NC	4,5	No connection, connected to ground externally

Characterization Test Circuit

