

VAB3101SB2 Variable Attenuator Patent product

Variable Attenuator VAB Series


- ◆ DC to 2.7GHz
- ◆ 0 to 31 dB in 1 dB Step
- 2 Watt or 5 Watt available




- Ultra small size with innovative microstrip technology
- Available step value:0~31dB.
- High accuracy
- High performance low cost
- Impedance: 50 or 75 ohm
- Operation repeatability:10000 times each switch
- POM material in rotary switch, operating up to 85°C
- Smart size

Characteristic

For example the testing curves of VAB3101SB2 of 31 dB

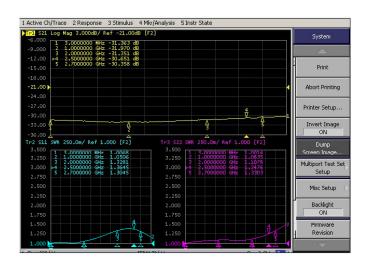

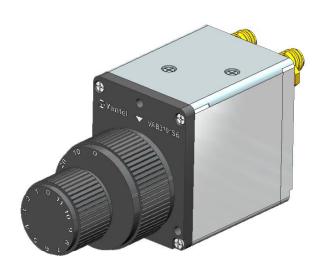

Specifications

Frequency Range DC to 2.7GHz
Attenuation 0 to 31dB
Step Value 1 dB
Insertion loss at 0dB 0.9dB at 2.7GHz

Attenuation Accuracy (Typical)

Attenuation (dB)	Freq. Range (GHz)	Attenuation Accuracy (dB)
0 to 31	DC to 2.7	-1.0~1.5

Nominal Impedance 50 Ohm Average Power 2 Watt Operating Temperature -40°C to +85°C


Attenuation 0~31dB


Freq. Range	VSWR(:1)	
(GHz)	Тур.	Max.
DC to 2.7	1.35	1.55





Package Outlines SMA Connector

Unit:mm(inch)

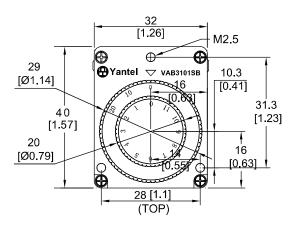


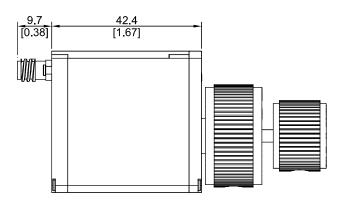



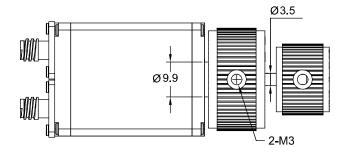

Mounting holes

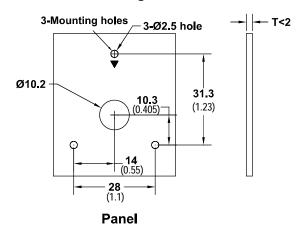

NOTE:

- 1. ALL dimensions shown in mm(tolerance: +/-0.2mm) unless stated otherwise
- 2. RoHS Compliant in accordance with EU Directive(2011/65/EU)

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



Application case:

Repeater: In deploying the indoor repeater system, Rotary Variable Attenuator is ideal to control the signal and keep each repeater in its specific coverage range.

This VAB series can be rack mountable, easier to operate from the rack outside.

Application

