

Description

Yantel's SMD bandpass filters have the advantages of low insertion loss and return loss, small size, high rejection, good product consistency, etc. The product adopts high-precision innovative manufacturing process, suitable for mass production, competitive cost.

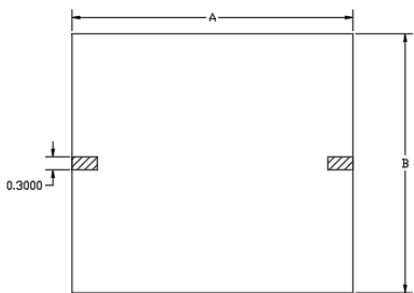
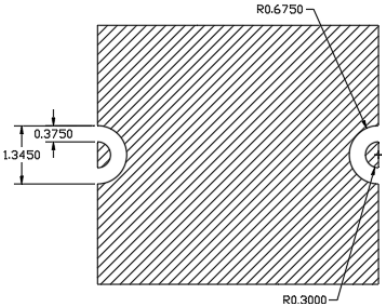
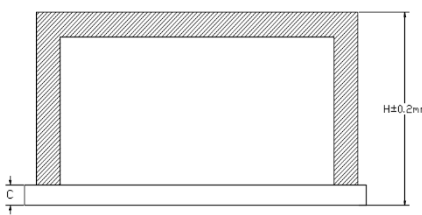
Features

- Small size
- Low loss, High rejection
- With shielding cover
- SMD Surface mounted
- Humidity level:MSL1
- Working temperature:-55 to +85°C
- Characteristic Impedance:50Ω
- Reel/tape package
- Competitive price and suitable for large volume use

Technical Data (Normal temperature +25°C)

No.	Parameter	Min.	Typical	Max.	Unit
1-1	Model No.	SYTFB031ND5S			
1-2	Size	8mm*6.35mm*2.3mm			
1-3	Central Frequency f_0		3.1		GHz
1-4	Working Frequency	2.9		3.33	GHz
1-5	Central Loss		3.5		dB
1-6	Band Fluctuation		0.8	1.0	dB
1-7	Return Loss	12	15		dB
1-8	Rejection@ DC-2.4GHz		40		dBc
	Rejection@3.85-7.0GHz		40		
1-9	Power				dBm
1-10	Working temperature	-55		+85	°C
1-11	Storage temperature	-55		+125	°C
1-12	Output installation method	Surface mounted			

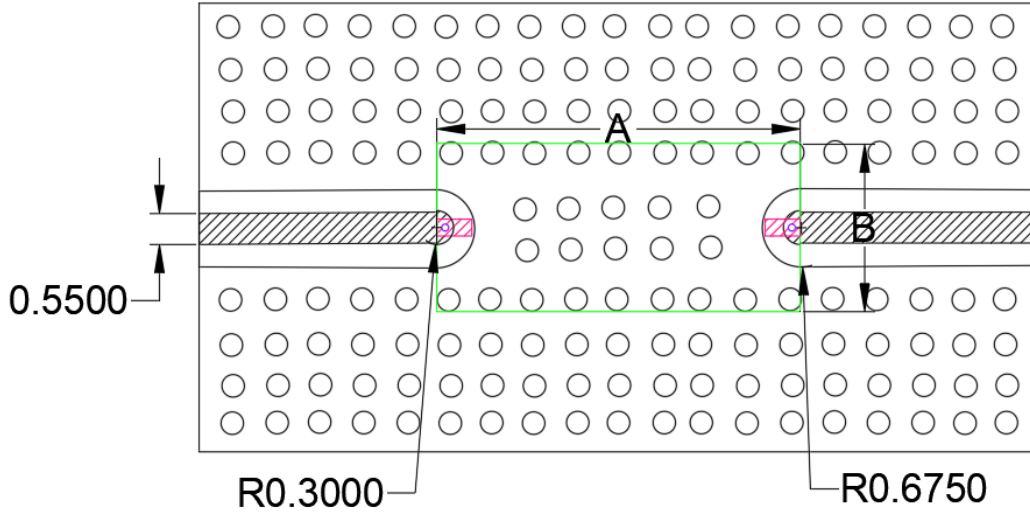
Dimensions

2-1	Dimension	See belowed picture (A、B dimension tolerance: $\pm 0.1\text{mm}$)
	Front	
	Rever	
		
2-2	Size	A: 8.0mm B: 6.35mm C:0.381mm H:2.3mm (the dimension unit in the drawing is mm, and the shape tolerance of A and B is $\pm 0.1\text{mm}$)
2-3	Substrate material	Alumina (Er=9.8)
2-4	Surface treatment	Gold plating

Version status

Version No.	Version date	File status
V1	20260420	✓

Recommended assembly drawing



Remark point:

1. Testing Substrate material is Rogers4350B(Er=3.66),thickness is 0.254mm
2. Make sure there is enough solder on the bottom surface of the filter and ensure good grounding.
3. The maximum temperature during assembly is 250°C.

Test Curve:

