

### Description

Yantel's surface mounted bandpass filters have the advantages of low insertion loss and return loss, small size, high rejection, good product consistency, etc. The product adopts high-precision thick film manufacturing process, suitable for mass production, competitive cost, and has obvious cost advantages compared with thin film filters.


### Features

- Small size
- Low loss, High rejection
- With shielding cover
- SMD Surface mounted
- Humidity level: MSL1
- Working temperature: -55 to +85°C
- Characteristic Impedance: 50Ω
- Tape package
- Competitive price and suitable for large volume use

### Technical Data (Normal temperature +25°C)

No.	Parameter	Min.	Typical	Max.	Unit
1-1	Model No.	SYTFBP8R35/1R3-6ID			
1-2	Size	6.5mm*6.0mm*2.5mm			
1-3	Central Frequency $f_0$		8.35		GHz
1-4	Working Frequency	7.7		9.0	GHz
1-5	Central Loss		1.5	2.2	dB
1-6	Band Fluctuation		0.7	1.0	dB
1-7	Return Loss	12	15		dB
1-8	Rejection@DC-5.8GHz	30	45		dBc
1-9	Power			33	dBm
1-10	Working temperature	-55		+85	°C
1-11	Storage temperature	-55		+125	°C
1-12	Output installation method	Surface mounted			


### Dimensions

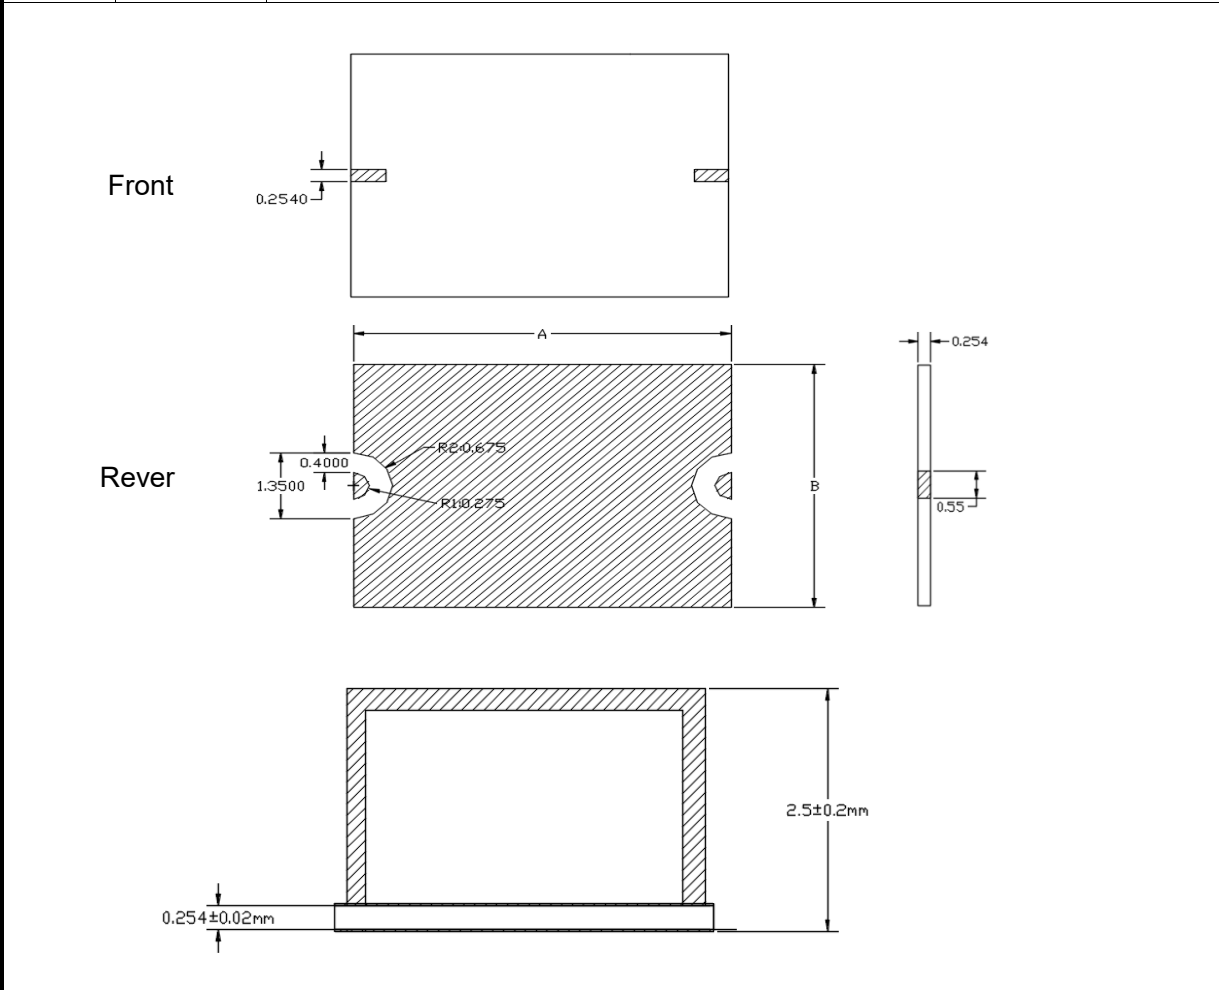2-1	Dimension	See belowed picture (A、B dimension tolerance: $\pm 0.1\text{mm}$ )
 <p>The drawing includes three views:         <ul style="list-style-type: none"> <li><b>Front View:</b> Shows a rectangular component with a thickness of 0.2540 mm.</li> <li><b>Rever View:</b> Shows the reverse side with dimensions A and B. It features a semi-circular notch with a radius of R10.275 and a smaller semi-circular feature with a radius of R0.675. A distance of 0.4000 mm is marked from the top edge to the center of the notch, and 1.3500 mm from the bottom edge to the center. A side view shows a thickness of 0.254 mm and a width of 0.55 mm.</li> <li><b>Bottom View:</b> Shows the component's profile with a height of <math>2.5 \pm 0.2\text{mm}</math> and a width of <math>0.254 \pm 0.02\text{mm}</math>.</li> </ul> </p>		
2-2	Size	A: 6.5mm    B: 6.0mm (the dimension unit in the drawing is mm, and the shape tolerance of A and B is $\pm 0.1\text{mm}$ )
2-3	Substrate material	Alumina (Er=9.8)
2-4	Surface treatment	Gold plating

### Version status

Version No.	Version date	File status
V1	20250121	✓

### Recommended assembly drawing

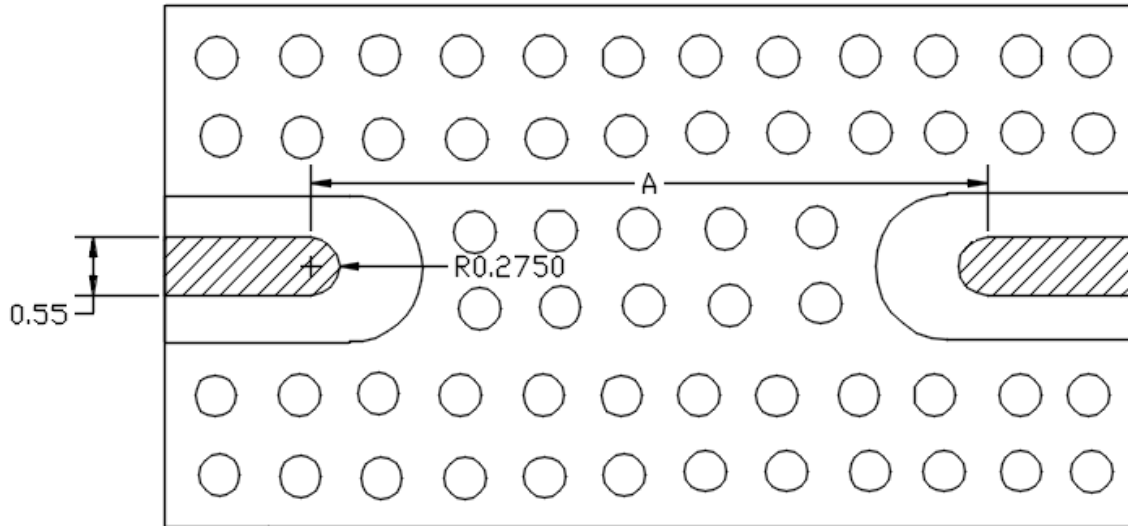

### Remark point:

1. Testing Substrate material is Rogers4350B(Er=3.66),thickness is 0.254mm
2. Make sure there is enough solder on the bottom surface of the filter and ensure good grounding.
3. The maximum temperature during assembly is 250°C.

### Test Curve:

