

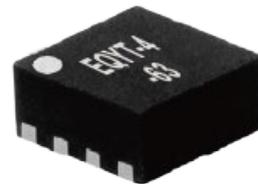


Features

- 4.2 dB Slope
- Negative Insertion Loss Slope vs. Frequency
- Wideband operation, DC to 6 GHz
- Excellent Power Handling Capability
- Small Size and simple to use (2 mm x 2 mm)
- Human Body Model (HBM): Class 2 (Pass 2000V)

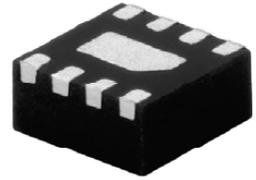

TOP VIEW

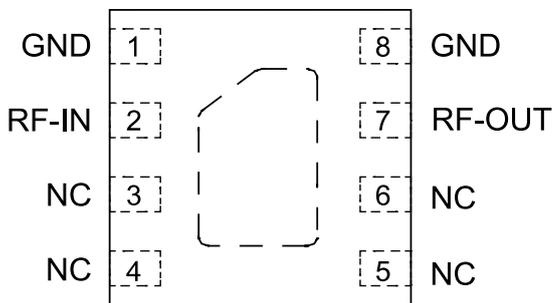


Applications

- Cellular
- PCS
- Communications
- Radar
- Defense


Electrical specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		6	GHz
Insertion Loss	0.01	4.4	4.8	5.2	dB
	1	-	4.5	-	
	2	-	3.6	-	
	3	2.3	2.7	3.0	
	4	-	1.9	-	
	5	0.6	1.1	1.5	
VSWR	0.01-1	-	1.07	-	:1
	1-2	-	1.11	-	
	2-3	-	1.16	-	
	3-4	-	1.19	-	
	4-5	-	1.25	-	
	5-6	-	1.32	-	
Input RF Power		31			dBm
Operating & Storage Condition					
Operation Temperature Range: -40°C ~ +85°C					
Storage Temperature Range: -65°C ~ +150°C					

Outline Drawing

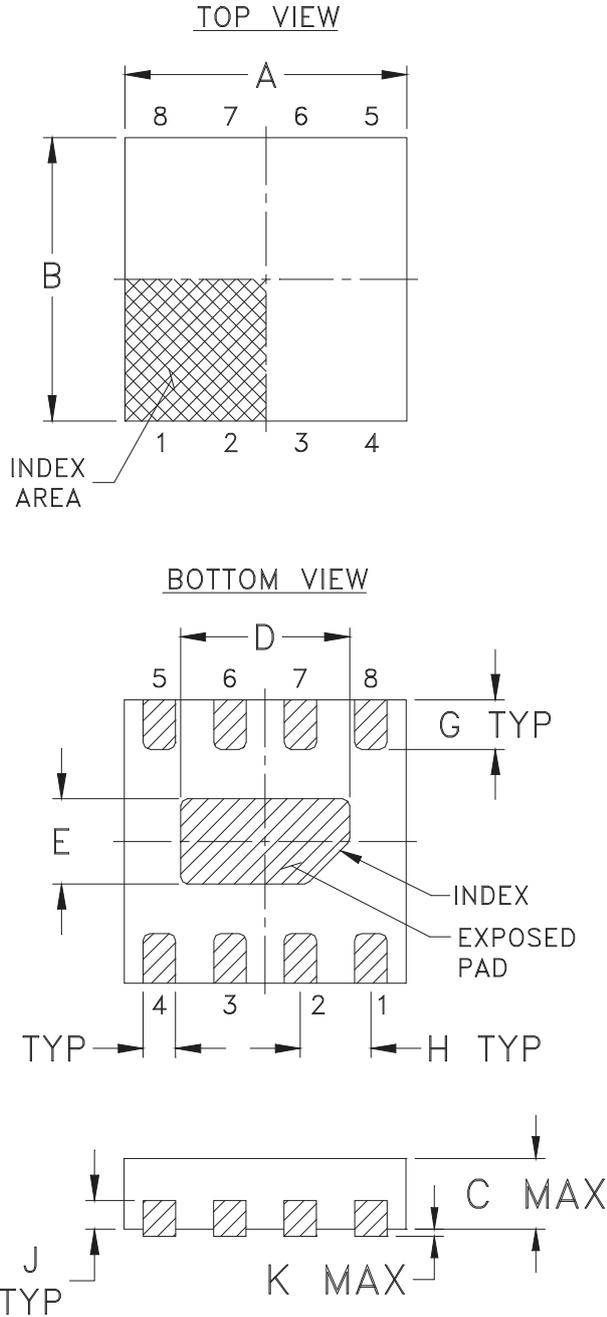

PCB Land Pattern

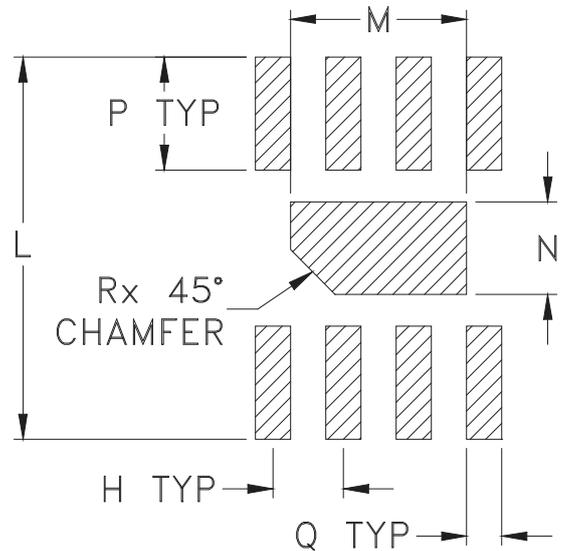

A	B	C	D	E	F	G	H	J	K	L	M
.079 (2.00)	.079 (2.00)	.039 (1.00)	.047 (1.20)	.024 (.60)	.009 (.23)	.014 (.35)	.020 (.50)	.008 (.20)	.002 (.05)	.106 (2.70)	.049 (1.25)
N	P	Q	R	WT, GRAM							
.026 (.65)	.031 (.80)	.010 (.25)	.012 (.30)	.006							

Units= inches (mm)



Tolerances=±.005 (±.13)

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Simplified Schematic And Pad Description

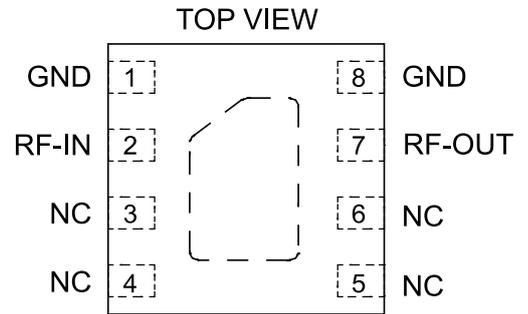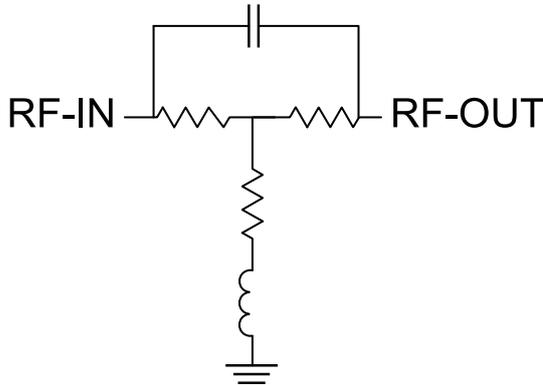

Function	Pad Number	Description
RF-IN	2	RF-Input pad
RF-OUT	7	RF-Output pad
GND	1,8 & Paddle	Ground
NC	3-6	No connection, connected to ground externally

Characterization Test Circuit

